


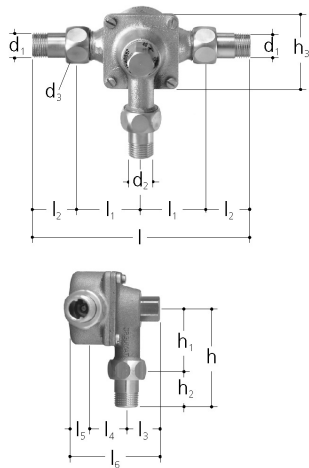

JRGUMAT Thermomischer Rotguss Verchromt

- Auslieferungszustand: 18 / 26 / 38 / 42 / 50°C (einstellbar)
- Werkstoff: Rotguss
- Anschluss: Aussengewinde
- * solange Vorrat

	DN (mm)	Gewindetyp	Zoll (inch)	Einstellbereich (°C)	Temperatur (°C)	JRG Code	NPK
*	15	GN	½	12 - 25	18	3100.118	
*	15	GN	½	22 - 30	26	3100.126	
	15	GN	½	36 - 40	38	3100.138	
*	15	GN	½	40 - 44	42	3100.142	
*	15	GN	½	50 - 65	50	3100.150	

	DN (mm)	GF Code	NPK	Gewicht (kg)
*	15	350 281 414	641 213	1.030
*	15	350 281 415	641 213	1.030
	15	350 281 416	641 213	1.030
*	15	350 281 417	641 213	1.030
*	15	350 281 410	641 213	1.030

	DN (mm)	d1 R (inch)	d2 R (inch)	d3 G (inch)	h (mm)	h1 (mm)	h2 (mm)	h3 (mm)	l (mm)	l1 (mm)	l2 (mm)	l3 (mm)	l4 (mm)	l5 (mm)	l6 (mm)
*	15	½	½	¾	75	50	25	60	168	50	29	26	30	16	72
*	15	½	½	¾	75	50	25	60	168	50	29	26	30	16	72
	15	½	½	¾	75	50	25	60	168	50	29	26	30	16	72
*	15	½	½	¾	75	50	25	60	168	50	29	26	30	16	72
*	15	½	½	¾	75	50	25	60	168	50	29	26	30	16	72

	DN (mm)	PN (bar)
*	15	10
*	15	10
	15	10
*	15	10
*	15	10

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>