


Data sheet

valid from: 10/15/23

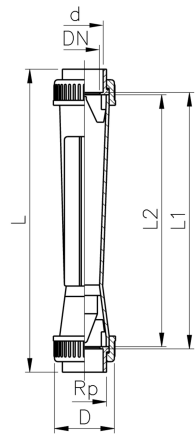

Short Version
Float in PVDF with magnet
With solvent cement sockets PVC-U BS Inch

Type	Scale range (l/h)	d (inch)	DN (mm)	Taper tube in Polysulfone O-rings in EPDM Code	Weight (kg)	Taper tube in PVC- U transp. Orings in EPDM Code	D (mm)	L (mm)	L1 (mm)	L2 (mm)
SK500	2.5 - 25	3/8	10	198 807 010	0.180	20014A300	35	199	171	165
SK510	5 - 50	3/8	10	198 807 011	0.180	20014A301	35	199	171	165
SK520	10 - 100	3/8	10	198 807 012	0.180	20014A302	35	199	171	165
SK600	8 - 80	1/2	15	198 807 013	0.180	20014A303	43	223	191	185
SK610	15 - 150	1/2	15	198 807 014	0.250	20014A304	43	223	191	185
SK620	20 - 200	1/2	15	198 807 015	0.170	20014A305	43	223	191	185
SK700	15 - 150	1	25	198 807 016	0.470	20014A306	60	250	206	200
SK710	30 - 300	1	25	198 807 017	0.380	20014A307	60	250	206	200
SK720	50 - 500	1	25	198 807 018	0.370	20014A308	60	250	206	200
SK730	100 - 1000	1	25	198 807 019	0.370	20014A309	60	250	206	200

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>