




Check valve type 562 PVC-U
With solvent cement sockets Inch BS

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

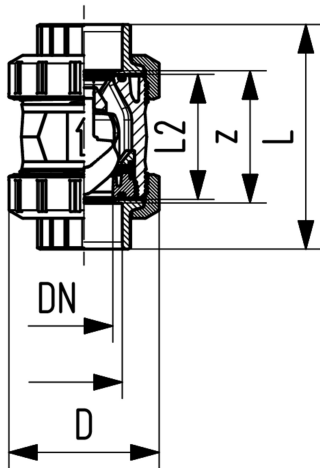

d	Size	DN	PN	kv-value	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
	3/8	10	16	190	161 562 061	1	0.120	161 562 071	1	0.120
	1/2	15	16	180	161 562 062	1	0.120	161 562 072	1	0.120
	3/4	20	16	380	161 562 063	1	0.250	161 562 073	1	0.270
	1	25	16	460	161 562 064	1	0.280	161 562 074	1	0.280
	1 1/4	32	16	850	161 562 065	1	0.490	161 562 075	1	0.490
	1 1/2	40	16	1080	161 562 066	1	0.760	161 562 076	1	0.770
	2	50	16	1670	161 562 067	1	1.378	161 562 077	1	1.370
75	2 1/2	65	16	2950	161 562 008	1	3.160	161 562 018	1	3.170
	3	80	16	3600	161 562 069	1	5.070	161 562 079	1	5.090
	4	100	16	4150	161 562 070	1	8.010	161 562 080	1	8.050

D	L	L2	z	closest inch
(mm)	(mm)	(mm)	(mm)	(inch)
50	92	56	60	
50	95	56	60	
58	110	65	69	
68	123	71	75	
84	146	85	89	
97	157	89	97	
124	183	101	110	
166	233	136	144	2 1/2
200	254	141	151	
238	301	164	174	

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>