
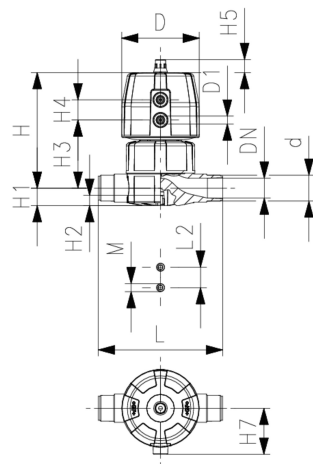


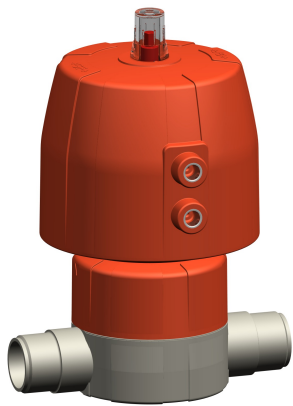

**PROGEF Standard Diaphragm valve DIASTAR TenPlus
FC (Fail safe to close)
With socket fusion spigots metric**

Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- For easy installation and removal
- Overall length EN 558
- Short overall length

Option:

- Individual configuration of the valve
- Comprehensive range of accessories available

* PN: PTFE

Working Pressure: **both sides**

* O-Ring material: FKM

d (mm)	DN (mm)	Size (inch)	PN (bar)	PN* (bar)	kv-value (Δp=1 bar) (l/min)	EPDM Code	Weight (kg)	PTFE/ EPDM* Code	Weight (kg)
20	15	½	10	10*	125	167 685 012	0.892	167 685 032	0.902
25	20	¾	10	10*	271	167 685 013	0.979	167 685 033	0.990
32	25	1	10	10*	481	167 685 014	1.730	167 685 034	1.750
40	32	1 ¼	10	10*	759	167 685 015	3.044	167 685 035	2.987
50	40	1 ½	10	10*	1263	167 685 016	4.615	167 685 036	4.650
63	50	2	10	10*	1728	167 685 017	5.309	167 685 037	5.337

d (mm)	D (mm)	D1_G (inch)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H7 (mm)	L (mm)	L2 (mm)	M (mm)	e (mm)	Lift = Hx (mm)
20	96	⅝	127	14	12	68	25	16	57	124	25	M6	1.9	7
25	96	⅝	132	18	12	73	25	16	57	144	25	M6	2.3	10
32	120	⅝	167	22	12	93	26	26	69	154	25	M6	2.9	13
40	150	¾	196	26	15	101	36	26	88	174	45	M8	3.7	15
50	180	¾	239	32	15	124	37	26	103	194	45	M8	4.6	19
63	180	¾	251	39	15	137	37	26	103	224	45	M8	5.8	23

d (mm)	closest inch (inch)
20	⅝
25	¾
32	1
40	1 ¼
50	1 ½
63	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>