


Wafer-Style, intermediate installation butterfly valve metal type 039
With electric actuator 24V
Flange standard Metric/Inch/ASTM - PN10
Disc: stainless steel DIN Norm 1.4408 without coating

Model:

- Wafer Style
- Body GGG40 (A 395 M:88, EN-JS 1020 EN1563) Rilsan coating
- Installation length: EN 558 row 20
- Interface according to DIN/ISO 5211
- Pressure range: 10 bar (DN 50-200); 6 bar (DN 250); 4 bar (DN 300 - 600)
- Axis DN50 - DN300: Single-piece axis with square profile, material stainless steel DIN Norm 1.4021
- Flange connection: DN50 - DN300: PN6, PN10, ANSI 125/150 Lbs., BS 10-D/E
- Voltage 24V, 50-60 Hz for EA-Actuator


Option:

- Other liner material on request
- Optional accessories: Fail-safe return unit

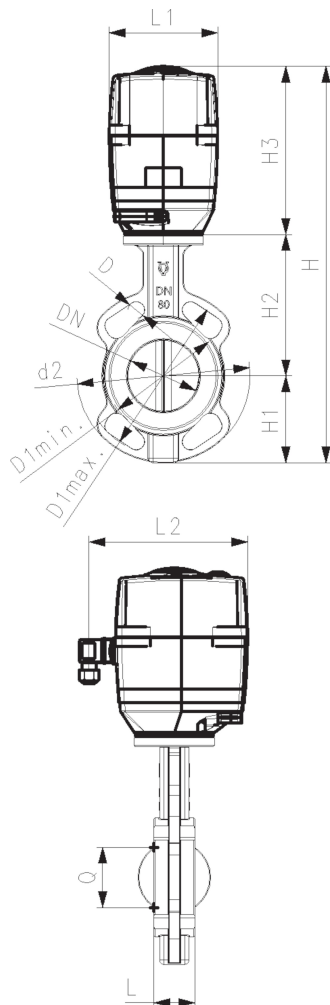

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	Disc: ductile iron/Rilsan® coated EPDM Code	PF	SP	Weight (kg)
63	50	2	10	3140	199 039 734	3 39 226 203	1	5.50
75	65	2 ½	10	4570	199 039 735	3 39 226 203	1	6.20
90	80	3	10	7140	199 039 736	3 39 226 203	1	7.90
110	100	4	10	11710	199 039 737	3 39 226 203	1	9.30
140	125	5	10	18570	199 039 738	3 39 226 203	1	11.00
160	150	6	10	27130	199 039 739	3 39 226 203	1	13.90
225	200	8	10	47130	199 039 740	3 39 226 203	1	18.50
280	250	10	6	77110	199 039 741	3 39 226 203	1	27.80
315	300	12	4	114240	199 039 742	3 39 226 203	1	36.70

d (mm)	Type of actu- ator	D3 (mm)	D4 (mm)	H (mm)	H1 (mm)	H2 (mm)	Q (mm)	L (mm)	L1 (mm)	L2 (mm)
63	EA45	96	165	381	53	140	32	43	28	122
75	EA120	114	185	403	63	152	51	46	28	122
90	EA120	131	190	418	71	159	69	46	28	122
110	EA120	152	229	453	87	178	89	52	64	181
140	EA120	182	254	481	102	191	115	56	60	220
160	EA250	209	285	533	122	203	143	56	60	220
225	EA250	262	343	598	149	241	194	60	60	220
280	EA250	323	333	682	201	273	243	68	70	220
315	EA250	373	353	750	231	311	293	78	70	220



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 4/3/25



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>