




**Ventilating valve type 595 PVC-U**  
**With solvent cement sockets Inch ASTM**  
**Inclusive 2 threaded valve ends NPT**

**Model:**

- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Spring loaded, spring made of NIMONIC 90, HALAR coated
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Compact installation length

| DN<br>(mm) | Thread Type | Size<br>(inch) | PN<br>(bar) | EPDM<br>Code | FKM<br>Code | D<br>(mm) | L<br>(mm) | t<br>(mm) |
|------------|-------------|----------------|-------------|--------------|-------------|-----------|-----------|-----------|
| 10         | NPT         | 3/8            | 16          | 161 595 101  | 161 595 111 | 50        | 111       | 19        |
| 15         | NPT         | 1/2            | 16          | 161 595 102  | 161 595 112 | 50        | 119       | 23        |
| 20         | NPT         | 3/4            | 16          | 161 595 103  | 161 595 113 | 58        | 137       | 25        |
| 25         | NPT         | 1              | 16          | 161 595 104  | 161 595 114 | 68        | 152       | 28        |
| 32         | NPT         | 1 1/4          | 16          | 161 595 105  | 161 595 115 | 84        | 176       | 31        |
| 40         | NPT         | 1 1/2          | 16          | 161 595 106  | 161 595 116 | 97        | 193       | 35        |
| 50         | NPT         | 2              | 16          | 161 595 107  | 161 595 117 | 124       | 229       | 38        |
| 65         | NPT         | 2 1/2          | 16          | 161 595 108  | 161 595 118 | 166       | 258       | 45        |
| 80         | NPT         | 3              | 16          | 161 595 109  | 161 595 119 | 200       | 277       | 48        |
| 100        | NPT         | 4              | 16          | 161 595 110  | 161 595 120 | 238       | 320       | 58        |

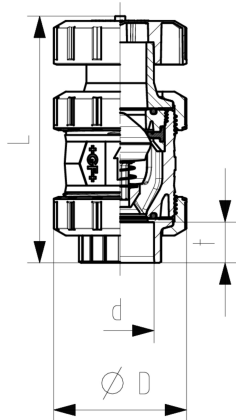

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:  
 info.ps@georgfischer.com Internet: <http://www.gfps.com>