


COOL-FIT PE Plus Reducer, d32-d225

Model:

- Pre-insulated PE100 **SDR11**, metric
- Insulation made from PUR foam
- Outer jacket impact and UV resistant. Color: Black
- Type B: Spigot Fitting with free ends


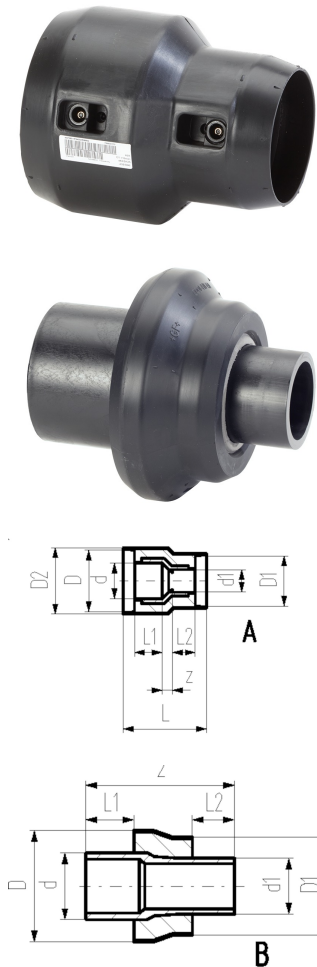


d/D (mm)	d1/D1 (mm)	SDR	PN (bar)	Code	weight (lb)
40/110	32/90	11	16	738 903 206	0.551
50/110	32/90	11	16	738 903 209	0.617
50/110	40/110	11	16	738 903 210	0.705
63/125	32/90	11	16	738 903 212	0.478
63/125	40/110	11	16	738 903 213	0.511
63/125	50/110	11	16	738 903 214	0.536
75/140	63/125	11	16	738 903 318	0.582
90/160	63/125	11	16	738 903 322	0.853
90/160	75/140	11	16	738 903 323	0.917
110/180	63/125	11	16	738 903 327	1.248
110/180	75/140	11	16	738 903 328	1.272
110/180	90/160	11	16	738 903 329	1.420
140/225	63/125	11	16	738 903 340	2.465
140/225	75/140	11	16	738 903 341	2.650
140/225	90/160	11	16	738 903 342	2.758
140/225	110/180	11	16	738 903 343	2.802
160/250	63/125	11	16	738 903 347	2.862
160/250	90/160	11	16	738 903 349	2.917
160/250	110/180	11	16	738 903 350	3.003
160/250	140/225	11	16	738 903 351	4.068
160/250	140/200	11	16	738 904 351	3.668
225/315	63/125	11	16	738 903 364	6.526
225/315	90/160	11	16	738 903 366	6.654
225/315	110/180	11	16	738 903 367	6.788
225/315	140/225	11	16	738 903 368	7.591
225/315	140/200	11	16	738 904 368	6.993
225/315	160/250	11	16	738 903 369	7.826

d/D (mm)	d1/D1 (mm)	D2 (mm)	L (mm)	L1 (mm)	L2 (mm)	z (mm)	closest inch (inch)	Type
40/110	32/90	117	143	40	36	17	1 ¼ - 1	A
50/110	32/90	117	151	44	36	21	1 ½ - 1	A
50/110	40/110	117	149	44	40	15	1 ½ - 1 ¼	A
63/125	32/90	132	160	48	36	26	2 - 1	A
63/125	40/110	132	159	48	40	21	2 - 1 ¼	A
63/125	50/110	132	159	48	44	17	2 - 1 ½	A
75/140	63/125			55	48	170	2 ½ - 2	B
90/160	63/125			62	48	190	3 - 2	B
90/160	75/140			62	55	189	3 - 2 ½	B
110/180	63/125			72	48	204	4 - 2	B
110/180	75/140			72	55	205	4 - 2 ½	B
110/180	90/160			72	62	205	4 - 3	B
140/225	63/125			84	48	225	5 - 2	B
140/225	75/140			84	55	237	5 - 2 ½	B
140/225	90/160			84	62	238	5 - 3	B
140/225	110/180			84	72	233	5 - 4	B
160/250	63/125			90	48	244	6 - 2	B
160/250	90/160			90	62	244	6 - 3	B
160/250	110/180			90	72	242	6 - 4	B
160/250	140/225			90	84	257	6 - 5	B
160/250	140/200			90	84	257	6 - 5	B

Data sheet

valid from: 1/25/25



d/D (mm)	d1/D1 (mm)	D2 (mm)	L (mm)	L1 (mm)	L2 (mm)	z (mm)	closest inch (inch)	Type
225/315	63/125			110	48	295	8 - 2	B
225/315	90/160			110	62	295	8 - 3	B
225/315	110/180			110	72	295	8 - 4	B
225/315	140/225			110	84	296	8 - 5	B
225/315	140/200			110	84	296	8 - 5	B
225/315	160/250			110	90	279	8 - 6	B

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>