


DIASTAR Ten CPVC
DA (Double acting)
ANSI Flanged

Model:

- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Flat sealing faces
- Overall length EN 558
- Connecting dimension: ANSI/ASME B 16.5 class 150, ASTM D 4024, BS 1560, BS EN 1759

Option:

- Individual configuration of the valve
- * O-Ring material: FKM

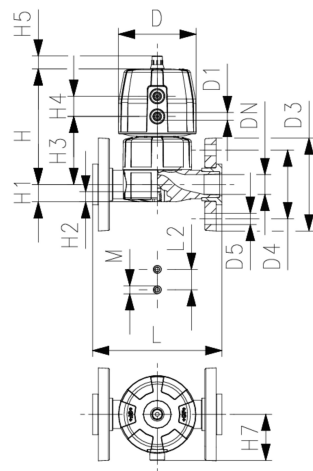

d	DN	Size	PN	PN	Cv-value	EPDM	SP	weight
(mm)	(mm)	(inch)	(bar)	(bar)	(l/min)	Code		(kg)
20	15	½	10	10*	125	163 657 712	1	0.657
25	20	¾	10	10*	271	163 657 713	1	1.080
32	25	1	10	10*	481	163 657 714	1	1.364
40	32	1 ¼	10	10*	759	163 657 715	1	2.166
50	40	1 ½	10	10*	1263	163 657 716	1	3.302
63	50	2	10	10*	1728	163 657 717	1	4.480

FKM	PTFE/EPDM	SP	weight
Code	Code		(kg)
163 657 762	163 657 732	1	0.657
163 657 763	163 657 733	1	1.080
163 657 764	163 657 734	1	1.385
163 657 765	163 657 735	1	2.187
163 657 766	163 657 736	1	3.331
163 657 767	163 657 737	1	4.508

D	D1_G	D3	D4	D5	H	H1	H2	H3	H4	H5	H7	L	L2	M
(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
68	⅝	95	60	16	101	14	12	60	24	16	43	130	25	M6
96	⅝	105	70	16	132	18	12	73	25	16	57	150	25	M6
96	⅝	115	79	16	143	22	12	84	25	16	57	160	25	M6
120	⅝	140	89	16	173	26	15	99	26	26	69	180	45	M8
150	⅝	150	98	16	214	32	15	119	36	26	88	200	45	M8
150	⅝	165	121	19	226	39	15	132	36	26	88	230	45	M8

Lift =

Hx

(mm)

7

10

13

15

19

23

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>