

Variable area flow meter type 335
Float in PVDF without magnet
With PVDF butt fusion spigots IR

Model:


- Standard guiding rod PVDF with stainless steel core (V4A) for DN50 and DN65
- Suitable limit switches see accessories for variable area flow meters

Option:

- 4-20 mA sensor
- Limit contacts
- Special scales for different media
- Union nuts and connecting parts in other materials on request

Scale range (l/h)	d (mm)	DN (mm)	Taper tube in PVC- U transp. Orings in EPDM Code	SP	Weight (kg)	D (mm)	L (mm)	L1 (mm)	L2 (mm)
----------------------	-----------	------------	---	----	----------------	-----------	-----------	------------	------------

50 - 500	32	25	800 046 023	1	0.480	58	453	341	335
100 - 1000	32	25	800 046 024	1	0.480	58	453	341	335
150 - 1500	40	32	800 046 025	1	0.620	72	460	341	335
250 - 2500	40	32	800 046 026	1	0.712	72	460	341	335
200 - 2000	50	40	800 046 027	1	0.900	83	466	341	335
300 - 3000	50	40	800 046 028	1	0.900	83	466	341	335
600 - 6000	50	40	800 046 029	1	1.003	83	466	341	335
600 - 6000	63	50	800 046 030	1	1.225	101	472	341	335
1000 - 10000	63	50	800 046 031	1	1.225	101	472	341	335
1500 - 15000	63	50	800 046 032	1	1.225	101	472	341	335
2000 - 20000	75	65	800 046 033	1	2.150	135	495	341	335
3000 - 30000	75	65	800 046 034	1	2.150	135	495	341	335
8000 - 60000	75	65	800 046 035	1	2.150	135	495	341	335

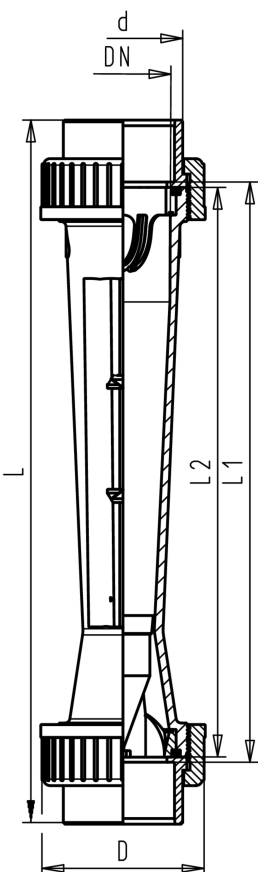

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 2/14/25



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>