




## Diaphragm valve type 604 PVC-U Unions with solvent cement socket ASTM

### Model:

- Compact full plastic design without screws
- High flow rate
- Actuator housing with thread for easy maintenance
- Quick opening & closing times
- For easy installation and removal
- Market standard installation length

### Option:

- Individual configuration of the valve
- \* O-Ring material: FKM

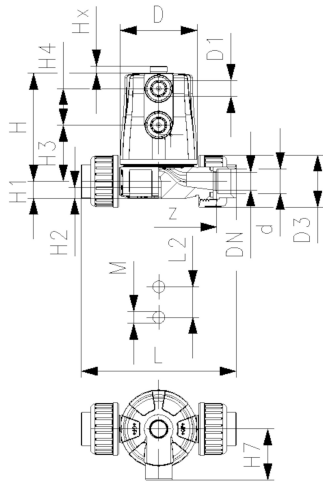

d (mm)	DN (mm)	Size (inch)	PN (bar)	Cv-value (l/min)	Actuator	EPDM Code	FKM Code	weight (kg)	PTFE/ EPDM* Code
20	15	½	6	125	FC	161 604 612	161 604 662	0.40	161 604 632
20	15	½	6	125	FO	161 604 614	161 604 664	0.37	161 604 634
20	15	½	6	125	DA	161 604 615	161 604 665	0.35	161 604 635

D	D1_G	D3	H	H1	H2	H3	H4	H7	L	L2	M	z	Lift = Hx
(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
65	¼	43	89	14	12	46	30	42	140.6	25	M6	96	6
65	¼	43	89	14	12	46	30	42	140.6	25	M6	96	6
65	¼	43	89	14	12	46	30	42	140.6	25	M6	96	6

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:  
info.ps@georgfischer.com Internet: <http://www.gfps.com>