


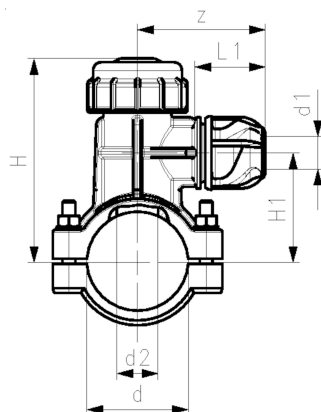

684C - Selle de raccordement pour tube PE et PVC avec raccords à compression, joints plats, boulons et écrous en acier inox

- Eau PN16
- Adapté aux tubes PE, PEX-a et PVC
- Matériel: PP
- Foret en laiton
- Joint de sortie : EPDM à double lèvre
- Joint de selle: O-ring NBR à lèvre
- Joint: O-ring NBR
- Vis et écrous: acier inoxydable
- Couleur: bleu/noir
- Type de kit de clé (L = petit, M = moyen, B = grand)
- B = nombre de vis
- M = type de vis
- Autres tailles disponibles avec le kit de réduction iJOINT

d (mm)	d1 (mm)	PN (bar)	B	M	Type de kit de clé de perçage
63	32	16	4	M8x50	S
75	40	16	4	M8x70	M
90	40	16	4	M8x70	M
110	25	16	6	M8x70	M
110	32	16	6	M8x70	M
110	63	16	6	M8x70	L
125	32	16	6	M8x70	L
160	25	16	6	M10x110	L
160	32	16	6	M10x110	L
160	63	16	6	M10x110	L

d (mm)	d1 (mm)	Code	CAN	SP	GP	Poids (kg)	d2 (mm)	H (mm)	H1 (mm)	L (mm)	L1 (mm)	z (mm)
63	32	158 400 702		1	8	0.536	26	125	65	90	63	100
75	40	158 400 705		1	5	0.795	33	142	75	90	74	120
90	40	158 400 708		1	5	0.853	33	152	85	100	74	120
110	25	158 400 710		1	2	1.110	33	190	108	130	60	100
110	32	158 400 711		1	2	1.132	33	190	108	130	77	118
110	63	158 400 716		1		1.763	40	205	118	130	125	180
125	32	158 400 718		1		1.290	40	210	115	135	77	118
160	25	158 400 719		1		2.290	40	235	140	160	60	120
160	32	158 400 720		1		2.303	40	235	140	160	76	120
160	63	158 400 723		1		2.673	40	250	155	160	128	180

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>