


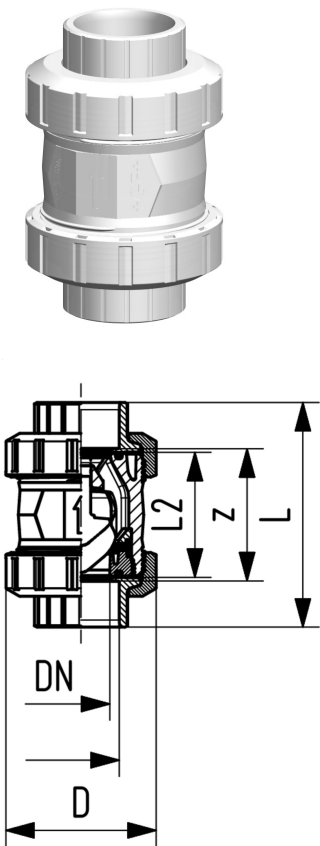

SYGEF标准型
562型锥形止回阀
带NPT螺纹承插端

型号:

- 材质：PVDF
- 适用于垂直或水平安装
- 最低密封背压1m水柱
- 弹簧预载，弹簧材质不锈钢(1.4310)
- 弹簧可用其他材料代替，见备件
- 安装简单，易拆卸
- 即使在高流速下也无振动
- 锥形球面，优化流体形态，双导向
- 紧凑型安装长度，与546型球阀相同
- Z尺寸，阀端和阀门螺帽与360型不兼容

注意：请确保避免由于焊缝导致的直径缩小(湍流)

NPT (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	FKM code	SP	weight (kg)	D (mm)	L (mm)	L2 (mm)	z (mm)
$\frac{3}{8}$	10	10	190	175 562 111	1	0,150	50	96	56	69
$\frac{1}{2}$	15	10	180	175 562 112	1	0,160	50	99	56	64
$\frac{3}{4}$	20	10	380	175 562 113	1	0,350	58	111	65	76
1	25	10	460	175 562 114	1	0,390	68	127	71	83
$1 \frac{1}{4}$	32	10	850	175 562 115	1	0,680	84	146	85	101
$1 \frac{1}{2}$	40	10	1080	175 562 116	1	1,000	97	157	89	111
2	50	10	1670	175 562 117	1	1,770	124	183	101	135

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: <http://www.gfps.com>