


PROGEF Standard 3-Way ball valve type 543 Pro
Horizontal/T-port 24V
With manual emergency override
With threaded sockets reinforced Rp

Model:


- Material: PP-H
- Voltage 24V AC/DC
- Factory set control range 90°<
- Basic position A-B-C opened, activated position B-C opened, see flow scheme
- Other positions possible by adjusting the limit switches
- Heating element, position feedback (Open/Close/ Middle)
- Integrated stainless steel mounting inserts

Option:


- Optional accessories: Fail-safe return unit, Monitoring board, Position controller, Profibus DP board

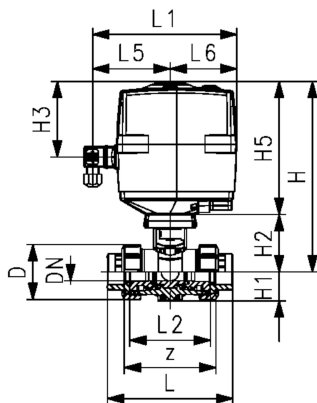


d	DN	Thread Type	Size	PN	kv-value	EA	EPDM	SP	Weight
(mm)	(mm)		(inch)	(bar)	(Δp=1 bar)		Code		(kg)
					(L/min)				
16	10	Rp	3/8	10	140	EA25	199 168 302	1	2.038
20	15	Rp	1/2	10	200	EA25	199 168 303	1	2.042
25	20	Rp	3/4	10	470	EA25	199 168 304	1	
32	25	Rp	1	10	793	EA25	199 168 305	1	2.252
40	32	Rp	1 1/4	10	1290	EA25	199 168 306	1	2.541
50	40	Rp	1 1/2	10	1910	EA25	199 168 307	1	
63	50	Rp	2	10	3100	EA25	199 168 308	1	3.722

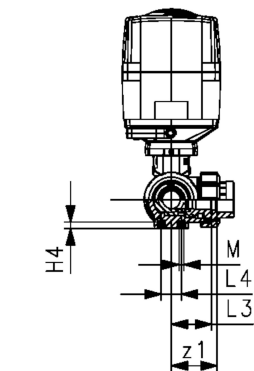


FKM	SP	Weight
Code		(kg)
199 168 312	1	2.038
199 168 313	1	2.042
199 168 314	1	2.131
199 168 315	1	2.252
199 168 316	1	2.541
199 168 317	1	2.830
199 168 318	1	3.722



D	H	H1	H2	H3	H5	H6	L	L1	L2	L3	L4	L5	L6	L7	L8
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
50	231	28	64	94	167	8	112	180	72	36	25	97	83	122	33
50	231	28	64	94	167	8	114	180	72	36	25	97	83	122	33
58	240	32	73	94	167	8	131	180	85	43	25	97	83	122	33
68	240	36	73	94	167	8	154	180	98	49	25	97	83	122	33
84	251	45	84	94	167	9	180	180	118	59	45	97	83	122	33
97	251	51	84	94	167	9	203	180	135	68	45	97	83	122	33
124	273	65	106	94	167	9	258	180	176	88	45	97	83	122	33



M	z	z1
(mm)	(mm)	(mm)
6	86	43
6	84	42
6	99	50
6	112	56
8	132	66
8	153	77
8	196	98



Data sheet

valid from: 1/5/24



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>