
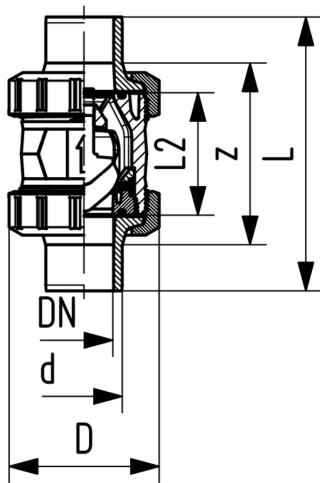


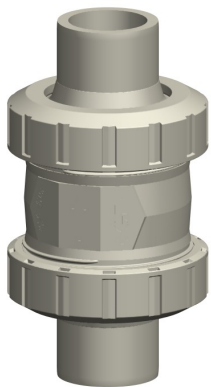

PROGEF Standard
Check valve type 562
With butt fusion spigots IR-Plus
SDR11 metric

Model:

- Material: PP-H
- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
20	15	10	180	167 562 082	0.080	167 562 092	0.080
25	20	10	380	167 562 083	0.170	167 562 093	0.180
32	25	10	460	167 562 084	0.190	167 562 094	0.190
40	32	10	850	167 562 085	0.340	167 562 095	0.340
50	40	10	1080	167 562 086	0.490	167 562 096	0.490
63	50	10	1670	167 562 087	0.930	167 562 097	0.930
75	65	10	2950	167 562 088	2.350	167 562 098	2.360
90	80	10	3600	167 562 089	3.660	167 562 099	3.680
110	100	10	4150	167 562 090	5.810	167 562 100	5.830

d (mm)	D (mm)	L (mm)	L2 (mm)	e (mm)	closest inch (inch)
20	50	130	56	1.9	½
25	58	143	65	2.3	¾
32	68	150	71	2.9	1
40	84	171	85	3.7	1 ¼
50	97	191	89	4.6	1 ½
63	124	220	101	5.8	2
75	166	266	136	6.8	2 ½
90	200	264	141	8.2	3
110	238	301	164	10.0	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>