


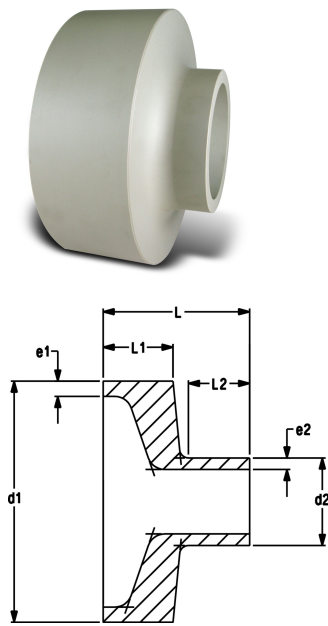

Concentric Flush Style Reducer (160-315mm), PN 10, Standard PP

IR Plus/Butt Fusion

Welds on some fittings with extreme reductions cannot be performed on all machines. If unsure please contact GF representative.

d1 (mm)	d2 (mm)	SDR	Code	e1 (mm)	e2 (mm)	L (mm)	L1 (mm)	L2 (mm)
160	63	11	727 909 656	14.6	5.8	95	58	28
160	75	11	727 909 657	14.6	6.9	89	56	23
160	90	11	727 909 658	14.6	8.2	89	54	23
160	110	11	727 909 659	14.6	10.0	88	50	23
200	63	11	727 909 662	18.2	5.8	115	78	28
200	75	11	727 909 663	18.2	6.9	109	76	23
200	90	11	727 909 664	18.2	8.2	109	74	23
200	110	11	727 909 665	18.2	10.0	108	70	23
200	160	11	727 909 668	18.2	14.6	116	61	33
225	63	11	727 909 669	20.5	5.8	125	88	28
225	75	11	727 909 670	20.5	6.9	119	86	23
225	90	11	727 909 671	20.5	8.2	119	84	23
225	110	11	727 909 672	20.5	10.0	118	80	23
225	160	11	727 909 675	20.5	14.6	126	71	33
225	200	11	727 909 676	20.5	18.2	124	64	33
250	63	11	727 909 677	22.8	5.8	119	85	28
250	75	11	727 909 678	22.8	6.9	115	80	23
250	90	11	727 909 679	22.8	8.2	116	80	23
250	110	11	727 909 680	22.8	10.0	118	80	28
250	160	11	727 909 683	22.8	14.6	118	70	38
250	200	11	727 909 684	22.8	18.2	118	67	38
250	225	11	727 909 685	22.8	20.5	118	64	38
315	63	11	727 909 696	28.7	5.8	154	100	28
315	75	11	727 909 697	28.7	6.9	150	100	23
315	90	11	727 909 698	28.7	8.2	151	100	23
315	110	11	727 909 699	28.7	10.0	148	100	23
315	160	11	727 909 702	28.7	14.6	148	100	23
315	200	11	727 909 703	28.7	18.2	151	100	33
315	225	11	727 909 704	28.7	20.5	153	99	33
315	250	11	727 909 705	28.7	22.8	157	86	48
355	225	11	727 909 706	32.2	20.5	150	99	51
355	250	11	727 909 707	32.2	22.7	150	117	53
355	315	11	727 909 708	32.2	28.6	170	111	59
400	225	11	727 909 709	36.3	20.5	170	119	51
400	250	11	727 909 710	36.3	22.7	170	115	55
400	315	11	727 909 711	36.3	28.6	170	111	59
400	355	11	727 909 712	36.3	32.2	170	107	63
450	225	11	727 909 713	40.9	20.5	180	100	40
450	250	11	727 909 714	40.9	22.7	180	100	40
450	315	11	727 909 715	40.9	28.6	180	100	40
450	355	11	727 909 716	40.9	32.2	180	127	53
450	400	11	727 909 717	40.9	36.3	180	127	53
500	225	11	727 909 718	45.4	20.5	190	139	51
500	250	11	727 909 719	45.4	22.7	190	137	53
500	315	11	727 909 720	45.4	28.6	190	131	59
500	355	11	727 909 721	45.4	32.2	190	131	59
500	400	11	727 909 722	45.4	36.3	180	124	56
500	450	11	727 909 723	45.4	40.9	180	124	56

Data sheet

valid from: 4/1/25



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>