


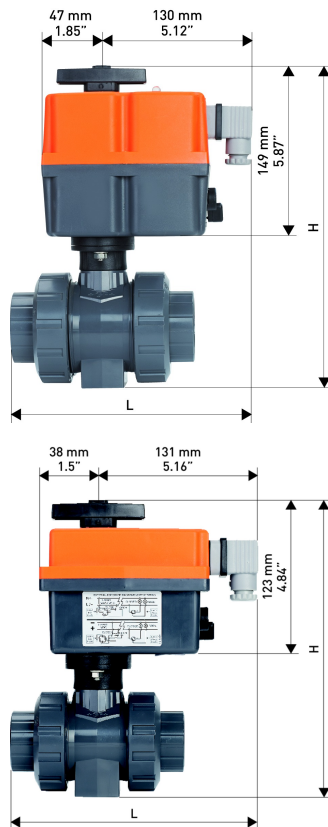

Ball valve type 104 PVC-C 24V
With solvent cement sockets Inch ASTM
Inclusive 2 threaded valve ends NPT

Model:

- Voltage according data sheet
- Control range 90°<)
- For easy installation and removal
- Integrated stainless steel mounting inserts

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value (Δp=1 bar) (l/min)	Voltage	EPDM Code	SP	Weight (kg)	FKM Code
16	10	3/8	10	70	24V	199 104 342	1	0.995	199 104 352
20	15	1/2	10	185	24V	199 104 343	1	0.995	199 104 353
25	20	3/4	10	350	24V	199 104 344	1	1.050	199 104 354
32	25	1	10	700	24V	199 104 345	1	1.120	199 104 355
40	32	1 1/4	10	1000	24V	199 104 346	1	1.290	199 104 356
	40		10	1600	24-240V				199 104 357
	50		10	3100	24-240V				199 104 358

H (mm)	L (mm)	Type of actuator	Inch (inch)	B (mm)
194	178.5	10Nm	3/8	50
194	178.5	10Nm	1/2	50
207	186.0	10Nm	3/4	58
217	192.5	10Nm	1	68
236	204.5	10Nm	1 1/4	84
275	208.5	20Nm	1 1/2	97
307	221.5	20Nm	2	124

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>