
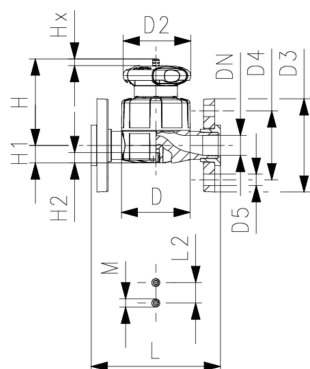




PROGEF标准型
517型隔膜阀
带PP-V支撑法兰 公/英制

型号:

- 材质：PP-H
- 相对于以往产品双倍流速
- 用一个压紧螺帽代替原先的四个螺栓
- 手轮带内置锁定装置
- 平/细齿连接面
- 总长度符合EN 558
- 连接尺寸：ISO 7005 PN10，EN 1092 PN10，DIN 2501 PN10，BS 4504 PN10

选项:

- 可提供其他阀门配置
- 自调节多功能模块带一体式限位开关

* O型圈材质: FKM

d	DN	Size	PN	kv-value
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)
				(l/min)
20	15	1/2	10	125
25	20	3/4	10	271
32	25	1	10	481
40	32	1 1/4	10	759
50	40	1 1/2	10	1263
63	50	2	10	1728

d	NBR	EPDM	PTFE/	FKM	weight
(mm)	code	code	EPDM	code	(kg)
			code		
20	167 517 102	167 517 112	167 517 132	167 517 162	0,480
25	167 517 103	167 517 113	167 517 133	167 517 163	0,629
32	167 517 104	167 517 114	167 517 134	167 517 164	1,296
40	167 517 105	167 517 115	167 517 135	167 517 165	1,640
50	167 517 106	167 517 116	167 517 136	167 517 166	2,601
63	167 517 107	167 517 117	167 517 137	167 517 167	3,544

d	D	D2	D3	D4	D5	H	H1	H2	L	L2	M	Lift = Hx	近似英寸
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(inch)
20	65	65	95	65	14	73	14	12	130	25	M6	7	1/2
25	80	65	105	75	14	81	18	12	150	25	M6	10	3/4
32	88	87	115	85	14	107	22	12	160	25	M6	13	1
40	101	87	140	100	18	115	26	15	180	45	M8	15	1 1/4
50	117	135	150	110	18	148	32	15	200	45	M8	19	1 1/2
63	144	135	165	125	18	166	39	15	230	45	M8	25	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>