

3-Way ball valve type 544 PVC-U
Vertical diverter ball
With solvent cement sockets metric


Model:

- Ball seals PTFE
- Electric actuator available separately
- Angle of operation 90°

Mode of action:

- For interconnection of two inputs

Individual configuration available on special request

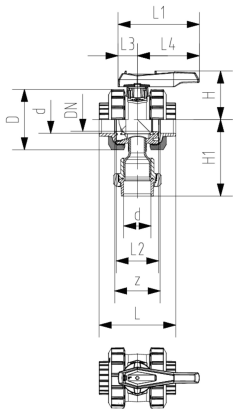

d	DN	PN	EPDM	PF	SP	Weight	GP	FKM
(mm)	(mm)	(bar)	Code			(kg)		Code
75	65	6	161 544 008	2 31 001 901	1	5.736		161 544 018
110	100	6	161 544 010	2 31 001 901	1	13.520		161 544 020

D	H	H1	L	L1	L2	L3	L4	z	closest inch
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(inch)
166	224	222	233	270	136	64	206	144	2 ½
238	245	289	301	320	164	64	256	174	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>