



**SYGEF Plus Membranventil Typ DIASTAR Sixteen
FC (Federkraft schliessend)
Mit Stumpfschweisssutzen metrisch SDR21**

Ausführung:



- Material: PVDF-HP
- Doppelter Durchfluss im Vergleich zum Vorgängermodell
- Eine zentrale Gehäusemutter ersetzt vier Schrauben
- In 90° Schritten drehbarer Luftanschluss
- Minimalster Totraum
- Ideal für High Purity Applikationen, nicht empfohlen für oxidierende Säuren
- **Nur für Wasseranwendungen**

Option:

- Armatur individuell konfigurierbar
- Umfangreiches Zubehör erhältlich


*auf Anfrage

*O-Ring Material: FKM weiss



d	d1	DN	DN1	Zoll	PN	kv-Wert (Δp=1 bar)	Ven- til-di- mensi- on d	PTFE/ EPDM* Code	NPK	SP	Gewicht (kg)
(mm)	(mm)	(mm)	(mm)	(inch)	(bar)	(l/min)	(mm)				
20	20	15	15	½	16	57	20	180 639 301		1	1.112
25	20	20	15	¾	16	89	25	180 639 303		1	1.230
25	25	20	20	¾	16	118	25	180 639 304		1	1.233
32	20	25	15	1	16	80	25	180 639 307		1	1.283
32	25	25	20	1	16	105	25	180 639 308		1	1.287
32	32	25	25	1	16	231	32	180 639 309		1	2.063
40	20	32	15	1 ¼	16	85	32	180 639 312		1	2.117
40	25	32	20	1 ¼	16	119	32	180 639 313		1	2.121
40	32	32	25	1 ¼	16	153	32	180 639 314		1	2.139
40	40	32	32	1 ¼	16	187	32	180 639 315		1	2.168
50	20	40	15	1 ½	16	86	25	180 639 318		1	1.402
50	25	40	20	1 ½	16	160	32	180 639 319		1	2.207
50	32	40	25	1 ½	16	206	32	180 639 320		1	2.212
50	40	40	32	1 ½	10	524	63	180 639 321		1	6.022
50	50	40	40	1 ½	10	667	63	180 639 322		1	6.032
63	20	50	15	2	16	84	25	180 639 325		1	1.479
63	25	50	20	2	16	150	32	180 639 326		1	2.292
63	32	50	25	2	16	184	32	180 639 327		1	2.298
63	40	50	32	2	16	471	63	180 639 328		1	6.199
63	50	50	40	2	16	610	63	180 639 329		1	6.264
63	63	50	50	2	16	747	63	180 639 330		1	6.277
90	20	80	15	3	16	82	32	180 639 341		1	2.577
90	25	80	20	3	16	103	32	180 639 342		1	2.584
90	32	80	25	3	16	129	32	180 639 343		1	2.600
90	50	80	40	3	10	623	63	180 639 345		1	6.717
90	63	80	50	3	10	696	63	180 639 346		1	6.745
110	20	100	15	4	16	78	32	180 639 351		1	2.847
110	25	100	20	4	16	103	32	180 639 352		1	2.853
110	32	100	25	4	16	131	32	180 639 353		1	2.870
110	50	100	40	4	10	604	63	180 639 355		1	7.133
110	63	100	50	4	10	661	63	180 639 356		1	7.163

d	D	D1	H	H3	H4	H5	L	L1	L3	L4	e	Hub = Hx	DN2	e1
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
20	96	¾	130	71	25	16	117	96	162	12	1.9	7	15	2
25	96	¾	131	72	25	16	133	108	162	16	1.9	10	20	2
25	96	¾	131	72	25	16	133	108	162	16	1.9	10	20	2
32	96	¾	135	76	25	16	142	120	162	19	2.4	10	20	2

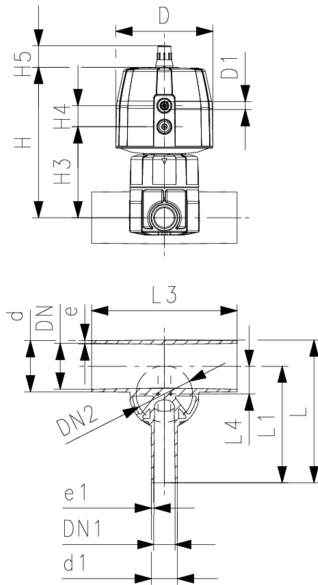

d	D	D1	H	H3	H4	H5	L	L1	L3	L4	e	Hub = Hx	DN2	e1
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
32	96	⅜	135	76	25	16	142	120	162	19	2.4	10	20	2
32	120	⅜	167	93	26	26	145	120	160	19	2.4	13	25	2
40	120	⅜	175	101	26	26	149	128	180	23	2.4	13	25	2
40	120	⅜	175	101	26	26	149	128	180	23	2.4	13	25	2
40	120	⅜	175	101	26	26	149	128	180	23	2.4	13	25	2
40	120	⅜	175	101	26	26	174	153	180	23	2.4	13	25	2
50	96	⅜	148	90	25	16	160	134	180	27	3.0	10	20	2
50	120	⅜	180	106	26	26	160	134	180	28	3.0	13	25	2
50	120	⅜	180	106	26	26	160	134	180	28	3.0	13	25	2
50	180	⅜	249	135	37	26	209	169	209	33	3.0	23	50	2
50	180	⅜	249	135	37	26	209	169	209	33	3.0	23	50	3
63	96	⅜	155	96	25	16	177	144	180	33	3.0	10	20	2
63	120	⅜	187	113	26	26	177	144	180	35	3.0	13	25	2
63	120	⅜	187	113	26	26	177	144	180	35	3.0	13	25	2
63	180	⅜	255	141	37	26	225	192	220	39	3.0	23	50	2
63	180	⅜	255	141	37	26	225	192	220	39	3.0	23	50	3
63	180	⅜	255	141	37	26	225	192	220	39	3.0	23	50	3
90	120	⅜	200	126	26	26	205	159	190	47	4.3	13	25	2
90	120	⅜	200	126	26	26	205	159	190	47	4.3	13	25	2
90	120	⅜	200	126	26	26	205	159	190	47	4.3	13	25	2
90	180	⅜	269	155	37	26	254	207	250	51	4.3	23	50	3
90	180	⅜	269	155	37	26	254	207	250	51	4.3	23	50	3
110	120	⅜	209	135	26	26	227	171	190	56	5.3	13	25	2
110	120	⅜	209	135	26	26	227	171	190	56	5.3	13	25	2
110	120	⅜	209	135	26	26	227	171	190	56	5.3	13	25	2
110	180	⅜	279	165	37	26	276	219	250	60	5.3	23	50	3
110	180	⅜	279	165	37	26	276	219	250	60	5.3	23	50	3

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>