


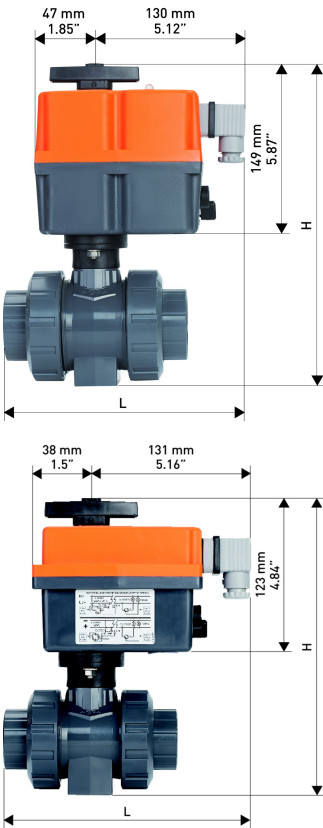

PROGEF Standard Ball valve type 104 24V With fusion sockets metric

Model:

- Material: PP-H
- Voltage according data sheet
- Control range 90 °
- For easy installation and removal
- Integrated stainless steel mounting inserts

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	Voltage	EPDM Code	Weight (kg)	FKM Code
16	10	10	70	24V	199 104 542	0.965	199 104 552
20	15	10	185	24V	199 104 543	0.965	199 104 553
25	20	10	350	24V	199 104 544	1.010	199 104 554
32	25	10	700	24V	199 104 545	1.055	199 104 555
40	32	10	1000	24V	199 104 546	1.180	199 104 556
50	40	10	1600	24-240V	199 104 547	1.860	199 104 557
63	50	10	3100	24-240V	199 104 548	2.115	199 104 558

H (mm)	L (mm)	Type of actu- ator	B (mm)
194	178.5	10Nm	50
194	78.5	10Nm	50
207	185.5	10Nm	58
217	190.5	10Nm	68
236	198.5	10Nm	84
275	203.5	20Nm	97
307	214.0	20Nm	124

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>