

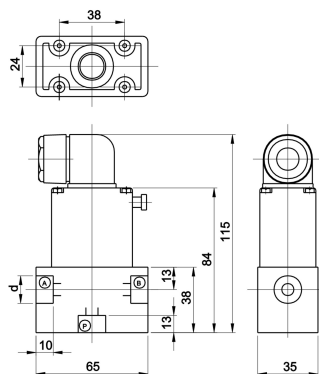




Solenoid valve type 157 PVC-U
Nominal voltage 24V DC *24V AC/DC
Function B straight-through valve 2/2 ways
With threaded sockets parallel female thread Rp

Model:

- Material PVC-U: with threaded sockets parallel female thread Rp
- With manual override
- Electrical connection: cable plug
- Protection class IP 65
- Circuit function A: FC, closed in rest position
- Circuit function B: FO, opened in rest position



DN (mm)	d (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	Inner thread (inch)	Voltage	Function
4	16	0 - 4	5.0	G3/8	24V DC	B
6	16	0 - 2	10.0	G3/8	24V DC	B
4	16	0 - 4	5.0	G3/8	230V 50Hz $\pm$ 10%	B
6	16	0 - 2	10.0	G3/8	230V 50Hz $\pm$ 10%	B
8	16	0 - 1	16.7	G3/8	230V 50Hz $\pm$ 10%	B
4	16	0 - 4	5.0	G3/8	24V DC	A
6	16	0 - 1	10.0	G3/8	24V DC	A
8	16	0 - 1	16.7	G3/8	24V AC/DC	A
4	16	0 - 4	5.0	G3/8	230V 50Hz $\pm$ 10%	A
6	16	0 - 2	10.0	G3/8	230V 50Hz $\pm$ 10%	A
8	16	0 - 1	16.7	G3/8	230V 50Hz $\pm$ 10%	A

EPDM Code	FKM Code
199 157 647	
199 157 648	
199 157 027	199 157 022
199 157 028	
199 157 029	
199 157 627	199 157 622
199 157 628	199 157 623
199 157 629	199 157 624
199 157 007	199 157 002
199 157 008	199 157 003
199 157 009	199 157 004

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>