


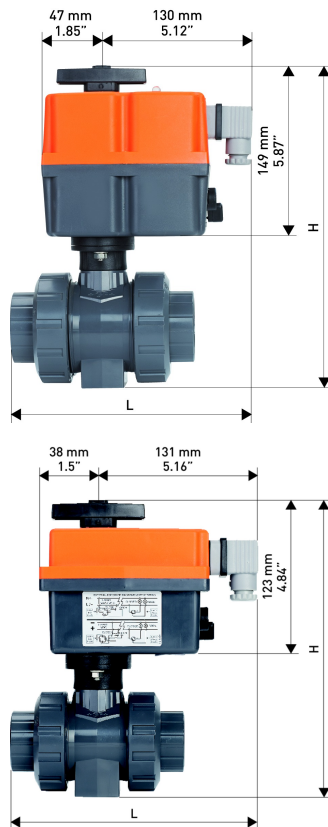

Ball valve type 104 PVC-U 24V With solvent cement sockets metric

Model:

- Voltage according data sheet
- Control range 90°<)
- For easy installation and removal
- Integrated stainless steel mounting inserts

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	Spannung	EPDM Code	SP	GP	Weight (kg)	FKM Code
16	10	10	70	24V	199 104 042	1		0.995	199 104 052
20	15	10	185	24V	199 104 043	1		0.995	199 104 053
25	20	10	350	24V	199 104 044	1		1.050	199 104 054
32	25	10	700	24V	199 104 045	1		1.930	199 104 055
40	32	10	1000	24V	199 104 046	1		1.290	199 104 056
50	40	10	1600	24-240V	199 104 047	1		3.625	199 104 057
63	50	10	3100	24-240V	199 104 048	1		2.395	199 104 058

d (mm)	H (mm)	L (mm)	Type of actuator	B (mm)
16	194	178.5	10Nm	50
20	194	178.5	10Nm	50
25	207	186.0	10Nm	58
32	217	192.5	10Nm	68
40	236	204.5	10Nm	84
50	275	208.5	20Nm	97
63	307	221.5	20Nm	124

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>