
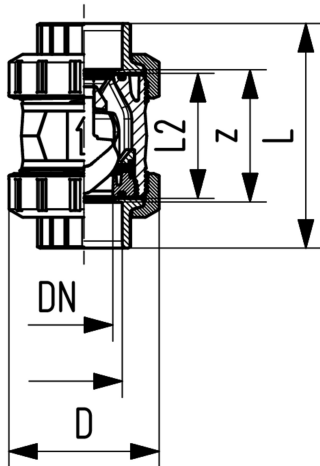




Check valve type 562 PVC-U
With solvent cement sockets Inch ASTM
Inclusive 2 threaded valve ends NPT
With PP-GF union nuts

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

NPT (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
3/8	10	16	190	700 247 699	1	0.130	700 247 709	1	0.130
1/2	15	16	180	700 247 700	1	0.130	700 247 710	1	0.130
3/4	20	16	380	700 247 701	1	0.260	700 247 711	1	0.280
1	25	16	460	700 247 702	1	0.300	700 247 712	1	0.300
1 1/4	32	16	850	700 247 703	1	0.510	700 247 713	1	0.510
1 1/2	40	16	1080	700 247 704	1	0.750	700 247 714	1	0.760
2	50	16	1670	700 247 705	1	1.330	700 247 715	1	1.330
2 1/2	65	16	2950	700 247 706	1	3.230	700 247 716	1	3.250
3	80	16	3600	700 247 707	1	5.080	700 247 717	1	5.100
4	100	16	4150	700 247 708	1	8.150	700 247 718	1	8.190

NPT (inch)	D (mm)	L (mm)	L2 (mm)	z (mm)
3/8	50	105	56	67
1/2	50	105	56	61
3/4	58	121	65	70
1	68	133	71	76
1 1/4	84	154	85	90
1 1/2	97	164	89	94
2	124	183	101	107
2 1/2	166	233	136	144
3	200	254	141	151
4	238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>