




**AquaTap Inline Flow Diverter (IFD) PROGEF PP Plus  
SDR11/PN10  
IR Plus Fusion**


- Shipped with nuts and tube blankoffs for pressure testing. Max pressure 150 psi.
- Inline Flow Diverter is designed for use with GF AquaTap Faucet  
Nut is PVDF material

**Model:**

- Material: PP-H/oil free cleaned



d (mm)	Code	e (mm)	H (mm)	L (mm)
25	<b>157 530 323</b>	2.3	68	180
32	<b>157 530 324</b>	2.9	72	180
40	<b>157 530 325</b>	3.7	76	180
50	<b>157 530 326</b>	4.6	81	180

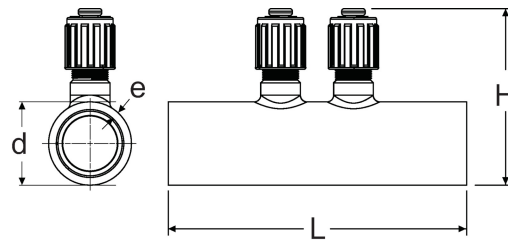

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>