


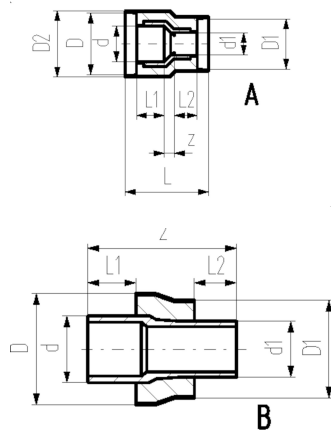


COOL-FIT 4.0 Reducer d32-d225

Model:

- Pre-insulated PE100 SDR11, metric
- Insulation made from GF HE foam
- Outer jacket impact resistant. Color: black
- A: Electrofusion Fitting with integrated sealing lip, for a water and vapour tight sealing
- B: Spigot Fitting with free end (separate electrofusion fitting needed for jointing)
- 738 904 351 and 738 904 368 for direct transitions from COOL-FIT 4.0 to COOL-FIT 2.0

d	d1	D	D1	DN	SDR	PN	Code	Weight
(mm)	(mm)	(mm)	(mm)	(mm)		(bar)		(kg)
40	32	110	90	32	11	16	738 903 206	0.250
50	32	110	90	40	11	16	738 903 209	0.280
50	40	110	110	40	11	16	738 903 210	0.320
63	32	125	90	50	11	16	738 903 212	0.217
63	40	125	110	50	11	16	738 903 213	0.232
63	50	125	110	50	11	16	738 903 214	0.243
75	63	140	125	65	11	16	738 903 318	0.264
90	63	160	125	80	11	16	738 903 322	0.387
90	75	160	140	80	11	16	738 903 323	0.416
110	63	180	125	100	11	16	738 903 327	0.566
110	75	180	140	100	11	16	738 903 328	0.577
110	90	180	160	100	11	16	738 903 329	0.644
140	63	225	125	125	11	16	738 903 340	1.118
140	75	225	140	125	11	16	738 903 341	1.202
140	90	225	160	125	11	16	738 903 342	1.251
140	110	225	180	125	11	16	738 903 343	1.271
160	63	250	125	150	11	16	738 903 347	1.298
160	90	250	160	150	11	16	738 903 349	1.323
160	110	250	180	150	11	16	738 903 350	1.362
160	140	250	225	150	11	16	738 903 351	1.845
160	140	250	200	150	11	16	738 904 351	1.664
225	63	315	125	200	11	16	738 903 364	2.960
225	90	315	160	200	11	16	738 903 366	3.018
225	110	315	180	200	11	16	738 903 367	3.079
225	140	315	225	200	11	16	738 903 368	3.443
225	140	315	200	200	11	16	738 904 368	3.172
225	160	315	250	200	11	16	738 903 369	3.550

d	d1	D2	L	L1	L2	z	Type
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
40	32	117	143	40	36	17	A
50	32	117	151	44	36	21	A
50	40	117	149	44	40	15	A
63	32	132	160	48	36	26	A
63	40	132	159	48	40	21	A
63	50	132	159	48	44	17	A
75	63			55	48	170	B
90	63			62	48	190	B
90	75			62	55	189	B
110	63			72	48	204	B
110	75			72	55	205	B
110	90			72	62	205	B
140	63			84	48	225	B
140	75			84	55	237	B
140	90			84	62	238	B
140	110			84	72	233	B
160	63			90	48	244	B
160	90			90	62	244	B
160	110			90	72	242	B

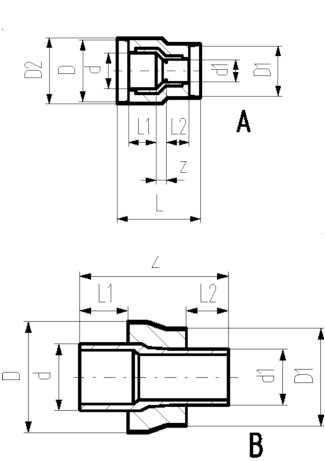

d	d1	D2	L	L1	L2	z	Type
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
160	140			90	84	257	B
160	140			90	84	257	B
225	63			110	48	295	B
225	90			110	62	295	B
225	110			110	72	295	B
225	140			110	84	296	B
225	140			110	84	296	B
225	160			110	90	279	B

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail:
info.ps@georgfischer.comInternet: <http://www.gfps.com>