


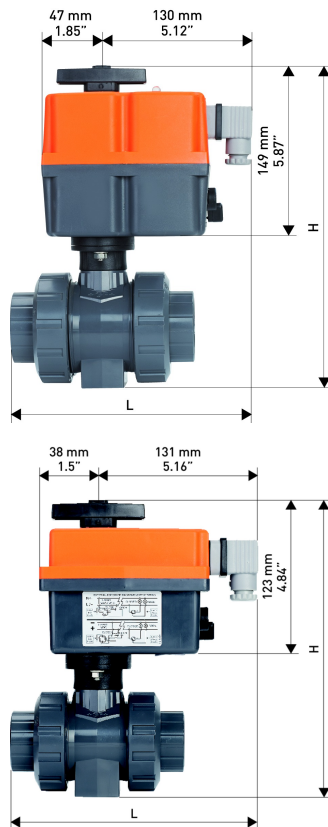

Ball valve type 104 PVC-U 100-230V With solvent cement sockets metric

Model:

- Voltage according data sheet
- Control range 90°<
- For easy installation and removal
- Integrated stainless steel mounting inserts

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	Voltage	EPDM Code	SP	Weight (kg)	FKM Code
16	10	10	70	100-230V	199 104 002	1	0.995	199 104 012
20	15	10	185	100-230V	199 104 003	1	0.995	199 104 013
25	20	10	350	100-230V	199 104 004	1	1.050	199 104 014
32	25	10	700	100-230V	199 104 005	1	1.120	199 104 015
40	32	10	1000	100-230V	199 104 006	1	1.290	199 104 016

d (mm)	B (mm)	H (mm)	L (mm)	Type of actuator
16	50	194	178.5	10Nm
20	50	194	178.5	10Nm
25	58	207	186.0	10Nm
32	68	217	192.5	10Nm
40	84	236	204.5	10Nm

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>