


**PROGEF Standard**  
**PP-H 止回阀 561型**  
**带焊接承插端 公制**

**型号:**

- 材质：PP-H
- 最低密封背压2m水柱
- 安装简单，易拆卸
- 即使在高流速下也无振动
- 锥形球面，优化流体形态，双导向
- 适用于垂直安装
- 紧凑型安装长度，与546型球阀相同
- Z尺寸，阀端和阀门螺帽与360型不兼容
- DN65-DN100为新产品

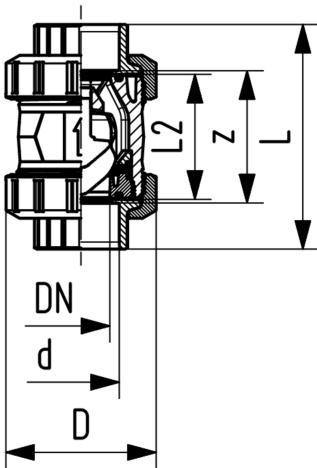

| d    | DN   | Size            | PN    | kv-value               | EPDM               | weight | FKM                | weight |
|------|------|-----------------|-------|------------------------|--------------------|--------|--------------------|--------|
| (mm) | (mm) | (inch)          | (bar) | ( $\Delta p=1$<br>bar) | code               | (kg)   | code               | (kg)   |
|      |      |                 |       | (l/min)                |                    |        |                    |        |
| 16   | 10   | $\frac{3}{8}$   | 10    | 190                    | <b>167 561 001</b> | 0,080  | <b>167 561 011</b> | 0,080  |
| 20   | 15   | $\frac{1}{2}$   | 10    | 180                    | <b>167 561 002</b> | 0,083  | <b>167 561 012</b> | 0,080  |
| 25   | 20   | $\frac{3}{4}$   | 10    | 380                    | <b>167 561 003</b> | 0,128  | <b>167 561 013</b> | 0,180  |
| 32   | 25   | 1               | 10    | 460                    | <b>167 561 004</b> | 0,200  | <b>167 561 014</b> | 0,190  |
| 40   | 32   | $1 \frac{1}{4}$ | 10    | 850                    | <b>167 561 005</b> | 0,332  | <b>167 561 015</b> | 0,340  |
| 50   | 40   | $1 \frac{1}{2}$ | 10    | 1080                   | <b>167 561 006</b> | 0,498  | <b>167 561 016</b> | 0,480  |
| 63   | 50   | 2               | 10    | 1670                   | <b>167 561 007</b> | 0,941  | <b>167 561 017</b> | 0,974  |
| 75   | 65   | $2 \frac{1}{2}$ | 10    | 2950                   | <b>167 561 008</b> | 2,300  | <b>167 561 018</b> | 2,310  |
| 90   | 80   | 3               | 10    | 3600                   | <b>167 561 009</b> | 3,560  | <b>167 561 019</b> | 3,580  |
| 110  | 100  | 4               | 10    | 4150                   | <b>167 561 010</b> | 5,900  | <b>167 561 020</b> | 5,930  |

| d    | D    | L    | L2   | z    | 近似英寸            |
|------|------|------|------|------|-----------------|
| (mm) | (mm) | (mm) | (mm) | (mm) | (inch)          |
| 16   | 50   | 93   | 56   | 67   | $\frac{3}{8}$   |
| 20   | 50   | 95   | 56   | 66   | $\frac{1}{2}$   |
| 25   | 58   | 109  | 65   | 77   | $\frac{3}{4}$   |
| 32   | 68   | 119  | 71   | 83   | 1               |
| 40   | 84   | 135  | 85   | 99   | $1 \frac{1}{4}$ |
| 50   | 97   | 147  | 89   | 105  | $1 \frac{1}{2}$ |
| 63   | 124  | 168  | 101  | 117  | 2               |
| 75   | 166  | 233  | 136  | 167  | $2 \frac{1}{2}$ |
| 90   | 200  | 254  | 141  | 180  | 3               |
| 110  | 238  | 301  | 164  | 215  | 4               |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: http://www.gfps.com