

**Diastar10 Plus 气动隔膜阀PVC-U
FC (常关) 低压
带PVC-U固定法兰 日标**

型号:

- 相对于以往产品双倍流速
- 用一个压紧螺帽代替原先的四个螺栓
- 气路连接可以旋转90度
- 平/细齿连接面
- 连接尺寸 : JIS B2238/39 10K


选项:

- 可提供其他阀门配置
- 提供多种附件

* PN: PTFE

工作压力 : 双边

* O型圈材质: FKM

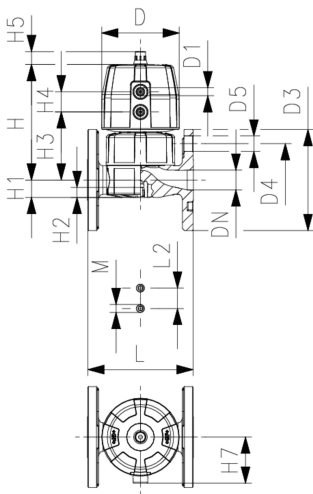

d (mm)	DN (mm)	Size (inch)	PN (bar)	PN* (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM code	SP	weight (kg)
20	15	1/2	10	8*	125	161 687 912	1	1,122
25	20	3/4	10	8*	271	161 687 913	1	1,220
32	25	1	10	8*	481	161 687 914	1	2,114
40	32	1 1/4	10	8*	759	161 687 915	1	3,604
50	40	1 1/2	10	8*	1263	161 687 916	1	5,510
63	50	2	10	6*	1728	161 687 917	1	6,357

PTFE/ EPDM code	SP	weight (kg)
161 687 932	1	1,132
161 687 933	1	1,231
161 687 934	1	2,134
161 687 935	1	3,624
161 687 936	1	5,540
161 687 937	1	6,385

D (mm)	D1_G (inch)	D3 (mm)	D4 (mm)	D5 (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H7 (mm)	L (mm)	L2 (mm)	M
96	1/8	95	70	15	127	14	12	68	25	16	57	110	25	M6
96	1/8	100	75	15	132	18	12	73	25	16	57	120	25	M6
120	1/8	125	90	19	167	22	12	93	26	26	69	130	25	M6
150	1/4	135	100	19	196	26	15	101	36	26	88	180	45	M8
180	1/4	140	105	19	239	32	15	124	37	26	103	180	45	M8
180	1/4	155	120	19	251	39	15	137	37	26	103	210	45	M8

**Lift =
Hx
(mm)**

7
10
13
15
19
23

Data sheet

valid from: 2026/3/27



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>