


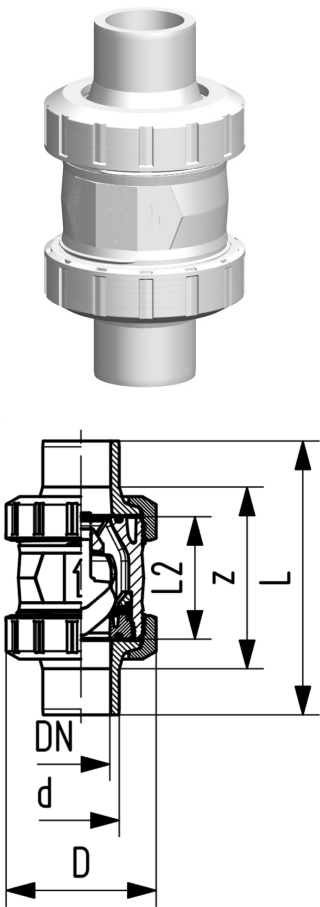

SYGEF标准型
562型锥形止回阀
带承插焊插端 公制

型号:

- 材质：PVDF
- 适用于垂直或水平安装
- 最低密封背压1m水柱
- 弹簧预载，弹簧材质不锈钢(1.4310)
- 弹簧可用其他材料代替，见备件
- 安装简单，易拆卸
- 即使在高流速下也无振动
- 锥形球面，优化流体形态，双导向
- 紧凑型安装长度，与546型球阀相同
- Z尺寸，阀端和阀门螺帽与360型不兼容

注意：请确保避免由于焊缝导致的直径缩小(湍流)

d	DN	PN	kv-value	FKM	weight	D	L	L2	Inch
(mm)	(mm)	(bar)	($\Delta p=1$ bar) (l/min)	code	(kg)	(mm)	(mm)	(mm)	(inch)
16	10	16	190	175 562 051	0,160	50	110	56	$\frac{3}{8}$
20	15	16	180	175 562 052	0,170	50	120	56	$\frac{1}{2}$
25	20	16	380	175 562 053	0,370	58	139	65	$\frac{3}{4}$
32	25	16	460	175 562 054	0,400	68	150	71	1
40	32	16	850	175 562 055	0,670	84	170	85	$1 \frac{1}{4}$
50	40	16	1080	175 562 056	1,030	97	190	89	$1 \frac{1}{2}$
63	50	16	1670	175 562 057	1,830	124	220	101	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com