


Check valve type 561 ABS
Without spring
With solvent cement sockets Inch BS

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

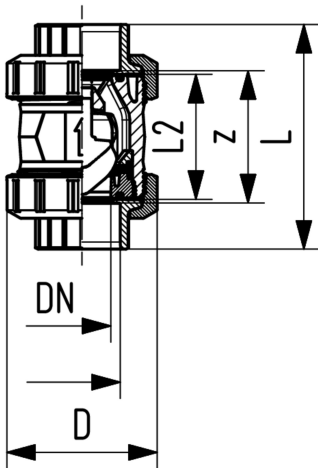

d	DN	Size	PN	kv-value	EPDM	SP	Weight	D	L	L2	z
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)	(mm)	(mm)	(mm)	(mm)
				(l/min)							
16	10	3/8	10	190	169 561 061	1	0.090	50	92	56	60
20	15	1/2	10	180	169 561 062	1	0.090	50	95	56	60
25	20	3/4	10	380	169 561 063	1	0.190	58	110	65	69
32	25	1	10	460	169 561 064	1	0.210	68	123	71	75
40	32	1 1/4	10	850	169 561 065	1	0.370	84	146	85	89
50	40	1 1/2	10	1080	169 561 066	1	0.570	97	157	89	97
63	50	2	10	1670	169 561 067	1	1.000	124	183	101	110
75	65	2 1/2	10	2950	169 561 068	1	2.420	166	233	136	144
90	80	3	10	3600	169 561 069	1	3.890	200	254	141	151
110	100	4	10	4150	169 561 070	1	6.140	238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>