

Wafer-Style, intermediate installation butterfly valve metal type 039
With pneumatic actuator - double acting (DA)
Flange standard Metric/Inch/ASTM - PN10
Disc: ductile iron/Rilsan® coated

Model:


- Wafer Style
- Body GGG40 (A 395 M:88, EN-JS 1020 EN1563) Rilsan coating
- Installation length: EN 558 row 20
- Interface according to DIN/ISO 5211
- Pressure range: 10 bar (DN 50-200); 6 bar (DN 250); 4 bar (DN 300 - 600)
- Axis DN50 - DN300: Single-piece axis with square profile, material stainless steel DIN Norm 1.4021
- Flange connection: DN50 - DN300: PN6, PN10, ANSI 125/150 Lbs., BS 10-D/E

Option:

- Other liner material on request

d	DN	Size	PN	kv-value	Disc: ductile	SP	Weight
(mm)	(mm)	(inch)	(bar)	(Δp=1 bar)	iron/Rilsan®		(kg)
				(l/min)	coated		
					EPDM		
					Code		

63	50	2	10	3167	199 039 104	1	5.32
75	65	2 ½	10	4667	199 039 105	1	6.02
90	80	3	10	7167	199 039 106	1	3.90
110	100	4	10	11833	199 039 107	1	4.64
140	125	5	10	18333	199 039 108	1	6.60
160	150	6	10	26667	199 039 109	1	8.06
225	200	8	10	47130	199 039 110	1	13.61
280	250	10	6	78333	199 039 111	1	21.71
315	300	12	4	115000	199 039 112	1	29.71

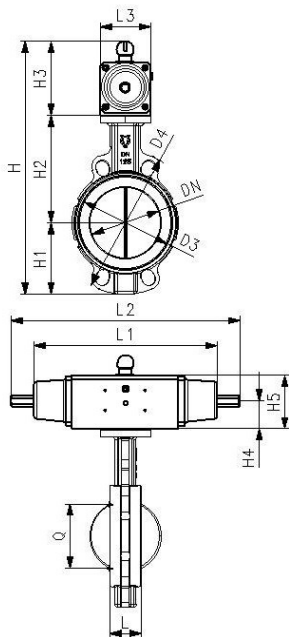

d	Disc:	Liner: NBR	PF
(mm)	stainless steel EPDM Code	Code	
63	199 039 117	199 039 656	3 39 226 265
75	199 039 118	199 039 657	3 39 226 265
90	199 039 119	199 039 658	3 39 226 265
110	199 039 120	199 039 659	3 39 226 265
140	199 039 121	199 039 660	3 39 226 265
160	199 039 122	199 039 661	3 39 226 265
225	199 039 123	199 039 662	3 39 226 265
280	199 039 124	199 039 663	3 39 226 265
315	199 039 125	199 039 664	3 39 226 265

d	Type of actuator	D3	D4	H	H1	H2	H3	H4	H5	H6	Q	L2	L3
(mm)		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
63	PA-35	95	165	308	55	140	113	35	60	15	32	183	60
75	PA-35	114	185	330	65	152	113	35	60	15	51	183	60
90	PA-35	131	190	345	73	159	113	38	71	15	69	183	60
110	PA-45	152	229	392	87	178	127	38	71	15	89	225	72
140	PA-45	182	254	420	102	191	127	46	86	15	115	225	72
160	PA-55	209	285	476	118	203	155	46	86	15	143	269	90
225	PA-60	262	343	559	149	245	165	56	106	15	194	314	100
280	PA-65	331	333	662	200	275	187	56	106	25	243	336	112
315	PA-70	380	353	741	227	315	199	68	130	25	293	365	124

Data sheet

valid from: 4/3/25



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>