


PROGEF Standard Check valve type 562
With threaded sockets reinforced Rp

Model:

- Material: PP-H
- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

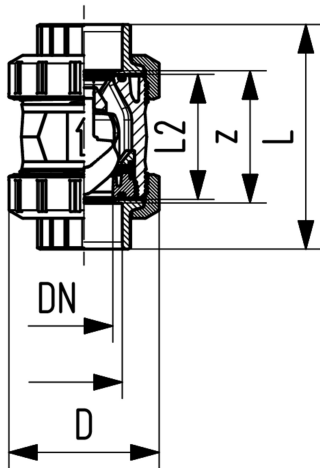

d	Rp	DN	PN	kv-value	EPDM	Weight	FKM	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code	(kg)	Code	(kg)
				(l/min)				
16	3/8	10	10	190	167 562 021	0.080	167 562 031	0.080
20	1/2	15	10	180	167 562 022	0.090	167 562 032	0.090
25	3/4	20	10	380	167 562 023	0.170	167 562 033	0.180
32	1	25	10	460	167 562 024	0.200	167 562 034	0.210
40	1 1/4	32	10	850	167 562 025	0.350	167 562 035	0.360
50	1 1/2	40	10	1080	167 562 026	0.500	167 562 036	0.510
63	2	50	10	1670	167 562 027	0.920	167 562 037	0.920

d	Rp	D	L	L2	z
(mm)	(inch)	(mm)	(mm)	(mm)	(mm)
16	3/8	50	96	56	69
20	1/2	50	99	56	67
25	3/4	58	111	65	78
32	1	68	127	71	85
40	1 1/4	84	146	85	100
50	1 1/2	97	157	89	106
63	2	124	183	101	121

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>