


3-Way ball valve type 188 ABS
Vertical/L-port 100-230V
With manual emergency override
With solvent cement sockets metric

Model:

- Vertical inlet solvent cement spigot metric
- Built on with electric actuator EA21
- Voltage 100-230 V, 50-60 Hz
- Control range 180°<
- Basic position B-C opened, activated position A-C opened, see flow scheme
- Control time 10 s/180°<
- Easy installation and removal using union on third outlet

d	DN	PN	Cv-value	EPDM	SP	weight
(mm)	(mm)	(bar)	(l/min)	Part No.		(kg)
16	10	10	49	199 188 162	1	2.001
20	15	10	77	199 188 163	1	2.004
25	20	10	146	199 188 164	1	2.090
32	25	10	260	199 188 165	1	2.179
40	32	10	437	199 188 166	1	2.407
50	40	10	667	199 188 167	1	2.609
63	50	10	1293	199 188 168	1	3.212

d	D	H	H1	H2	H3	H5	L	L1	L2	L5	L6	L7	L8	z	closest inch (inch)
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
16	50	231	62	64	94	167	92	180	56	97	83	122	33	64	3/8
20	50	231	62	64	94	167	95	180	56	97	83	122	33	64	1/2
25	58	240	72	73	94	167	111	180	66	97	83	122	33	74	3/4
32	68	240	77	73	94	167	123	180	71	97	83	122	33	79	1
40	84	251	87	84	94	167	146	180	85	97	83	122	33	95	1 1/4
50	97	251	97	84	94	167	157	180	89	97	83	122	33	95	1 1/2
63	124	273	112	106	94	167	183	180	101	97	83	122	33	107	2

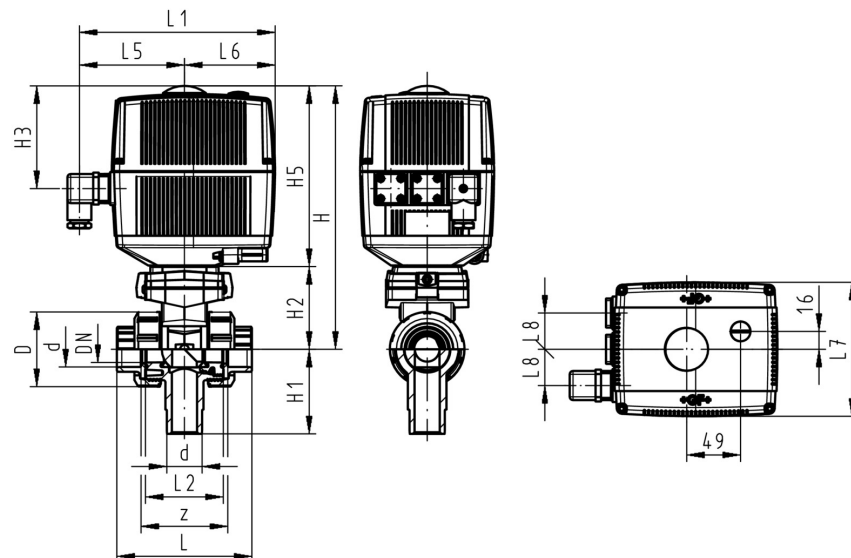

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 1/8/18



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>