Datenblatt

gültig ab: 24.01.25





ELGEF Plus Anbohrschelle PE100
d63-400mm / SDR11 / Mit 360° drehbarem Abgang

- 5 bar Gas / 16 bar Wasser
- Mit eingebautem Bohrer zum Anbohren unter Druck stehender Leitungen
- Komplett mit Unterteil
- 4 mm Steckkontakt
- Wegbegrenzte Schweissanzeige
- Langer Abgangsstutzen
- O-Ring gedichtete Schraubkappe
- d355-400mm. Nicht geeignet für Rohre mit einer Wanddicke grösser als SDR17.

*Topload: Lieferung ohne Unterteil, als Top Load mit Werkzeug 799.350.477 zu montieren; Winkeladapterstecker (799.350.340) für Schweisskabel erforderlich.

d (mm)	Do3 (mm)	DN (mm)	PN (bar)	Code	NPK	Gewicht (kg)
63	20	50	16	**193 131 402**		0.697
63	25	50	16	**193 131 403**		0.637
63	32	50	16	**193 131 404**		0.701
63	40	50	16	**193 131 405**		0.718
63	63	50	16	**193 131 437**		1.426
75	20	65	16	**193 131 442**		0.831
75	25	65	16	**193 131 443**		0.830
75	32	65	16	**193 131 444**		0.812
75	40	65	16	**193 131 445**		0.849
75	63	65	16	**193 131 447**		1.549
90	20	80	16	**193 131 452**		0.794
90	25	80	16	**193 131 453**		0.790
90	32	80	16	**193 131 454**		0.770
90	40	80	16	**193 131 455**		0.811
90	63	80	16	**193 131 457**		1.494
110	20	100	16	**193 131 462**		0.826
110	25	100	16	**193 131 463**		0.808
110	32	100	16	**193 131 464**		0.831
110	40	100	16	**193 131 465**		0.805
110	63	100	16	**193 131 467**		1.097
125	20	100	16	**193 131 472**		0.880
125	25	100	16	**193 131 473**		0.878
125	32	100	16	**193 131 474**		0.878
125	40	100	16	**193 131 475**		0.874
125	63	100	16	**193 131 477**		1.184
140	20	125	16	**193 131 482**		0.887
140	25	125	16	**193 131 483**		0.874
140	32	125	16	**193 131 484**		0.894
140	40	125	16	**193 131 485**		0.920
140	63	125	16	**193 131 487**		1.180
160	20	150	16	**193 131 492**		0.916
160	25	150	16	**193 131 493**		0.912
160	32	150	16	**193 131 494**		0.915
160	40	150	16	**193 131 495**		0.936
160	63	150	16	**193 131 497**		1.221
180	20	150	16	**193 131 502**		0.994
180	25	150	16	**193 131 503**		1.001
180	32	150	16	**193 131 504**		0.957
180	40	150	16	**193 131 505**		1.007
180	63	150	16	**193 131 507**		1.587
200	20	200	16	**193 131 512**		1.015
200	25	200	16	**193 131 513**		1.015
200	32	200	16	**193 131 514**		0.985
200	40	200	16	**193 131 515**		1.024
200	63	200	16	**193 131 517**		1.290
225	20	200	16	**193 131 522**		1.016

Datenblatt

gültig ab: 24.01.25





	d (mm)	Do3 (mm)	DN (mm)	PN (bar)	Code	NPK	Gewicht (kg)
	225	25	200	16	**193 131 523**		1.025
	225	32	200	16	**193 131 524**		1.019
	225	40	200	16	**193 131 525**		1.029
	225	63	200	16	**193 131 527**		1.738
	250	20	250	16	**193 131 532**		1.025
	250	25	250	16	**193 131 533**		1.026
	250	32	250	16	**193 131 534**		0.996
	250	63	250	16	**193 131 537**		1.733
	250	40	250	16	**193 131 535**		1.008
	280	63	250	16	**193 131 548**		1.478
	315	63	300	16	**193 131 558**		1.481
Topload	355	63	350	16	**193 131 557**		1.481
Topload	400	63	400	16	**193 131 577**		1.473

	d (mm)	Do3 (mm)	L (mm)	L4 (mm)	Db (mm)	W (mm)	H (mm)	H4 (mm)	SDR Rohr
	63	20	130	71	32	164	186	108	9 - 11
	63	25	130	71	32	164	186	108	9 - 11
	63	32	130	76	32	164	186	108	9 - 11
	63	40	137	81	32	164	186	108	9 - 11
	63	63	160	100	32	164	134	112	9 - 11
	75	20	130	71	32	164	191	113	9 - 11
	75	25	130	71	32	164	191	113	9 - 11
	75	32	130	76	32	164	191	113	9 - 11
	75	40	137	81	32	164	191	113	9 - 11
	75	63	160	100	32	164	240	118	9 - 11
	90	20	130	71	32	164	199	121	9 - 11
	90	25	130	71	32	164	199	121	9 - 11
	90	32	130	76	32	164	199	121	9 - 11
	90	40	137	81	32	164	199	121	9 - 11
	90	63	160	100	35	164	248	126	9 - 11
	110	20	130	71	32	164	209	131	9 - 17.6
	110	25	130	71	32	164	209	131	9 - 17.6
	110	32	130	76	32	164	209	131	9 - 17.6
	110	40	137	81	32	164	209	131	9 - 17.6
	110	63	160	100	35	164	258	136	9 - 17.6
	125	20	130	71	32	164	216	138	9 - 17.6
	125	25	130	71	32	164	216	138	9 - 17.6
	125	32	130	76	32	164	216	138	9 - 17.6
	125	40	137	81	32	164	216	138	9 - 17.6
	125	63	160	100	35	164	265	143	9 - 17.6
	140	20	130	71	32	164	233	146	9 - 17.6
	140	25	130	71	32	164	233	146	9 - 17.6
	140	32	130	76	32	164	233	146	9 - 17.6
	140	40	137	81	32	164	233	146	9 - 17.6
	140	63	160	100	35	164	273	151	9 - 17.6
	160	20	130	71	32	164	243	156	9 - 17.6
	160	25	130	71	32	164	243	156	9 - 17.6
	160	32	130	76	32	164	243	156	9 - 17.6
	160	40	137	81	32	164	243	156	9 - 17.6
	160	63	160	100	35	164	283	161	9 - 17.6
	180	20	130	71	32	164	244	166	9 - 26
	180	25	130	71	32	164	244	166	9 - 26
	180	32	130	76	32	164	244	166	9 - 26
	180	40	137	81	32	164	244	166	9 - 26
	180	63	160	100	35	164	293	171	9 - 26
	200	20	130	71	32	164	254	176	9 - 26
	200	25	130	71	32	164	254	176	9 - 26
	200	32	130	76	32	164	254	176	9 - 26

Datenblatt

gültig ab: 24.01.25

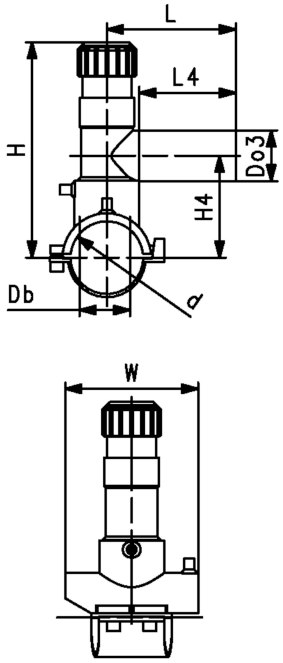

	d (mm)	Do3 (mm)	L (mm)	L4 (mm)	Db (mm)	W (mm)	H (mm)	H4 (mm)	SDR Rohr
	200	40	137	81	32	164	254	176	9 - 26
	200	63	160	100	35	164	303	181	9 - 26
	225	20	130	71	32	164	266	188	11 - 26
	225	25	130	71	32	164	266	188	11 - 26
	225	32	130	76	32	164	266	188	11 - 26
	225	40	137	81	32	164	266	188	11 - 26
	225	63	160	100	35	164	315	193	11 -26
	250	20	130	76	32	164	279	201	11 - 26
	250	25	130	76	32	164	279	201	11 - 26
	250	32	130	76	32	164	279	201	11 - 26
	250	63	160	100	35	164	328	206	11 - 26
	250	40	137	81	32	164	279	201	11 - 26
	280	63	160	100	35	164	343	206	11 - 26
	315	63	160	100	35	164	381	206	11 - 33
Topload	355	63	160	100	35	165	381	206	17 - 33
Topload	400	63	160	100	35	165	403	206	17 - 33

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com