
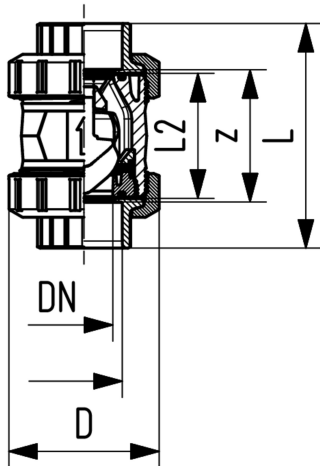




Check valve type 561 PVC-U
Without spring
With solvent cement sockets Inch ASTM
Inclusive 2 threaded valve ends NPT
With PP-GF union nuts

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d (mm)	DN (mm)	Thread Type	Size (inch)	PN (bar)	kv- value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
16	10	NPT	3/8	16	190	700 247 659	1	0.130	700 247 669	1	0.130
20	15	NPT	1/2	16	180	700 247 660	1	0.161	700 247 670	1	0.130
25	20	NPT	3/4	16	380	700 247 661	1	0.184	700 247 671	1	0.280
32	25	NPT	1	16	460	700 247 662	1	0.372	700 247 672	1	0.300
40	32	NPT	1 1/4	16	850	700 247 663	1	0.510	700 247 673	1	0.510
50	40	NPT	1 1/2	16	1080	700 247 664	1	0.720	700 247 674	1	0.760
63	50	NPT	2	16	1670	700 247 665	1	1.327	700 247 675	1	1.330
75	65	NPT	2 1/2	16	2950	700 247 666	1	3.230	700 247 676	1	3.250
90	80	NPT	3	16	3600	700 247 667	1	5.080	700 247 677	1	5.100
110	100	NPT	4	16	4150	700 247 668	1	8.150	700 247 678	1	8.190

D (mm)	L (mm)	L2 (mm)	z (mm)
50	105	56	67
50	105	56	61
58	121	65	70
68	133	71	76
84	154	85	90
97	164	89	94
124	183	101	107
166	233	136	144
200	254	141	151
238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>