


SYGEF标准型
561型锥形止回阀
带NPT螺纹承插端

型号:

- 材质：PVDF
- 最低密封背压2m水柱
- 安装简单，易拆卸
- 即使在高流速下也无振动
- 锥形球面，优化流体形态，双导向
- 适用于垂直安装
- 紧凑型安装长度，与546型球阀相同
- Z尺寸，阀端和阀门螺帽与360型不兼容

注意：请确保避免由于焊缝导致的直径缩小(湍流)

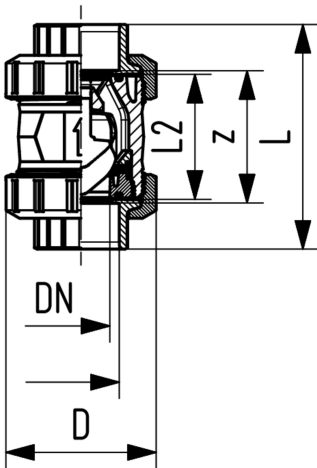

d	DN	Thread Type	Inch	PN	kv-value	FKM	SP	weight
(mm)	(mm)		(inch)	(bar)	($\Delta p=1$ bar)	code		(kg)
					(l/min)			
16	10	NPT	$\frac{3}{8}$	10	190	175 561 111	1	0,150
20	15	NPT	$\frac{1}{2}$	10	180	175 561 112	1	0,160
25	20	NPT	$\frac{3}{4}$	10	380	175 561 113	1	0,350
32	25	NPT	1	10	460	175 561 114	1	0,390
40	32	NPT	$1 \frac{1}{4}$	10	850	175 561 115	1	0,680
50	40	NPT	$1 \frac{1}{2}$	10	1080	175 561 116	1	1,000
63	50	NPT	2	10	1670	175 561 117	1	1,770

D	L	L2	z
(mm)	(mm)	(mm)	(mm)
50	96	56	69
50	99	56	64
58	111	65	76
68	127	71	83
84	146	85	101
97	157	89	111
124	183	101	135

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com