


**3-Way ball valve type 544 PVC-U**  
**Vertical diverter ball**  
**With solvent cement sockets metric**

**Model:**

- Special valve in general accordance to ISO 16135
- Ball seat PTFE
- Electric actuator available separately
- Angle of operation 90°

**Mode of action:**

- For interconnection of two inputs
- Individual configuration available on special request

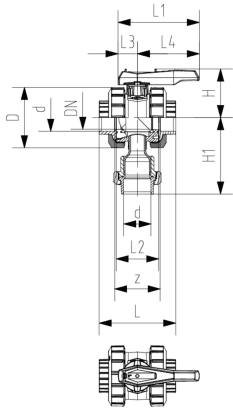

d (mm)	DN (mm)	PN (bar)	EPDM Code	PF	SP	Weight (kg)	GP	FKM Code
75	65	6	161 544 008	2 31 001 901	1	5.736		161 544 018
110	100	6	161 544 010	2 31 001 901	1	13.520		161 544 020

D (mm)	H (mm)	H1 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	z (mm)	closest inch (inch)
166	224	222	233	270	136	64	206	144	2 ½
238	245	289	301	320	164	64	256	174	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>