


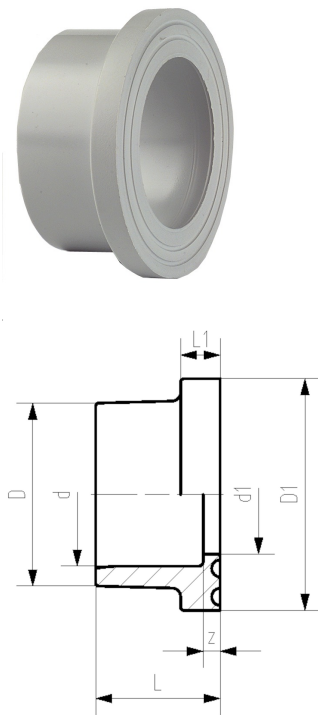

Collet PVC-C

Surface d'étanchéité combinée lisse et striée, métrique

Exécution:

- Joint: Joint plat EPDM code n° 748 400 306 - 320
- Joint: Joint profilé EPDM code n° 748 440 706 - 720, FKM code n° 749 440 706 - 720
- Brides (metric & ANSI): PVC-U, PP-V, PP-Acier

Remarque:

* Un chanfrein peut être nécessaire en cas d'utilisation avec une vanne papillon type 037/038/039

d	DN	PN	Code	CAN	SP	Poids	D	D1	d1	L	L1	z	
(mm)	(mm)	(bar)				(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
20	15	16	723 790 106		10	0.011	27	34	16.0	21	6	3	
25	20	16	723 790 107		10	0.018	33	41	21.0	24	7	3	
32	25	16	723 790 108		10	0.027	41	50	28.0	27	7	3	
40	32	16	723 790 109		10	0.032	50	61	36.0	30	8	3	
50	40	16	723 790 110		10	0.054	61	73	45.0	34	8	3	
63	50	16	723 790 111		10	0.097	76	90	57.0	41	9	3	
75	65	16	723 790 112		10	0.168	91	106	69.0	47	10	3	
90	80	16	723 790 113		10	0.265	108	125	81.8	56	11	5	
110	100	16	723 790 114		10	0.441	131	150	101.5	66	12	5	
*	160	150	16	723 790 117		12	1.139	188	213	152.0	91	16	5
225	200	10	723 790 120		2	1.860	248	274	217.0	125	25	6	

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>