


Ball valve type 374 PVC-U With threaded sockets NPT

Model:

- True double union safe block ball valve
- Ball seals PE/PTFE
- Handle includes integrated tool for ball seat adjustment
- Very compact dimensions
- z-dimension, valve end and union nut compatible with type 375

Range of use:

- Water application

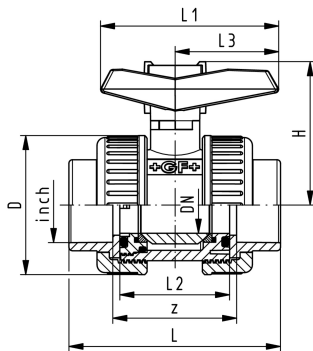

Size (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)
1/2	15	16	185	161 374 012	60	0.130
3/4	20	16	350	161 374 013	40	0.205
1	25	16	700	161 374 014	30	0.205
1 1/4	32	16	1000	161 374 015	20	0.435
1 1/2	40	16	1600	161 374 016	12	0.690
2	50	16	3100	161 374 017	6	1.160
2 1/2	65	10	5000	161 374 018	3	2.200
3	80	10	7000	161 374 019	2	3.310
4	100	10	11000	161 374 020	1	5.925

D (mm)	H (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	z (mm)
50	55	88	67	42	40	48
59	61	91	77	48	45	53
68	69	102	87	54	51	58
80	81	116	102	62	59	68
94	91	126	119	72	70	78
115	113	149	146	86	84	93
145	129	184	179	110	103	118
168	146	212	209	128	120	140
210	179	244	250	150	141	160

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>