




DN 15 - 50

**050型 滤网组件 PVC-U
带胶粘承插端 公制**

型号:


- ¹ Screen with 1 extension and end plate, solvent cemented
- ² Screen with 2 extensions and end plate, solvent cemented
- ³ Screen with 3 extensions and end plate, solvent cemented

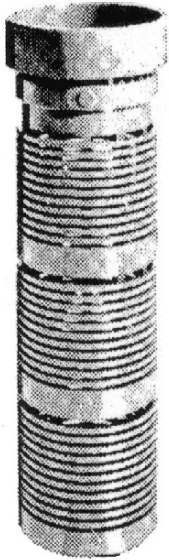


DN65-100

Data sheet

valid from: 2024/7/19



DN 15-50

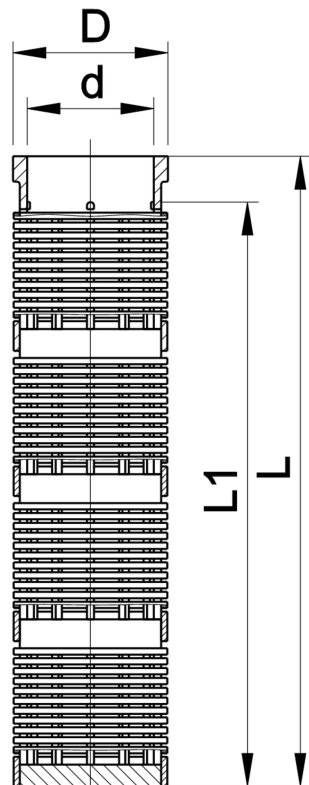

DN 65-100

d (mm)	DN (mm)	Inch (inch)	kv-value ($\Delta p=1$ bar) (l/min)	code	SP	weight (kg)
20	15	1/2	105	161 050 026	1	0,035
25	20	3/4	228	161 050 027	1	0,039
32	25	1	390	161 050 028	1	0,046
40	32	1 1/4	563	161 050 029	1	0,147
50	40	1 1/2	813	161 050 030	1	0,172
63	50	2	1590	161 050 031	1	0,192
*1	75	2 1/2	9640	161 050 032	1	0,837
*2	90	3	14790	161 050 033	1	0,944
*3	110	4	15213	161 050 034	1	1,338

D (mm)	L (mm)	L1 (mm)	perforations # (mm)
50	80	64	2
50	83	64	2
50	86	64	2
90	131	105	2
90	136	105	2
90	143	105	2
*1	110	260	3
*2	110	345	3
*3	125	490	3

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>