


Data sheet

valid from: 1/9/25

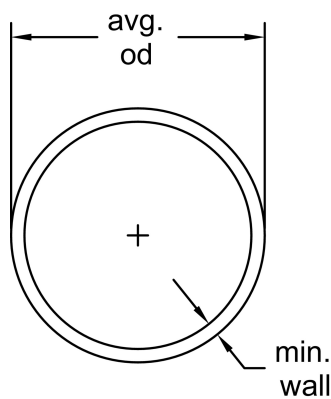

Schedule 80 Clear PVC

- Max Water Pressure at 73°F (22.7°C) with solvent-cemented joints
- Belled-end pipe available upon request
- Must be purchased in full box qty
- 20ft Plain end length available upon request

Size (inch)	P/L	Code	Average O.D. (inch)	min. wall (inch)	Max Water Pressure (psi)
¼	H56	H0800025PL1000	0.540	0.119	570
⅜	H56	H0800038PL1000	0.675	0.126	460
½	H56	H0800050PL1000	0.840	0.147	420
¾	H56	H0800075PL1000	1.050	0.154	340
1	H56	H0800100PL1000	1.315	0.179	320
1 ¼	H56	H0800125PL1000	1.660	0.191	260
1 ½	H56	H0800150PL1000	1.900	0.200	240
2	H56	H0800200PL1000	2.375	0.218	200
2 ½	H56	H0800250PL1000	2.875	0.276	210
3	H56	H0800300PL1000	3.500	0.300	190
4	H56	H0800400PL1000	4.500	0.337	160
6	H56	H0800600PL1000	6.625	0.432	140

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>