




Check valve type 561 PVC-C
With solvent cement sockets Inch ASTM
Inclusive 2 threaded valve ends NPT
With PP-GF union nuts

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

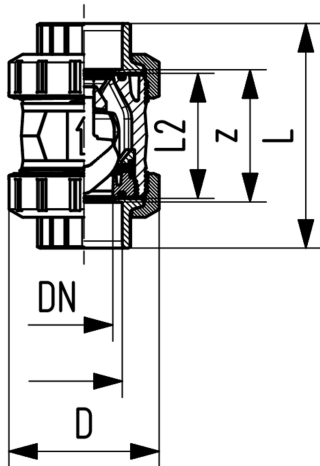

d (mm)	DN (mm)	Thread Type	Size (inch)	PN (bar)	kv- value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
16	10	NPT	3/8	16	190	700 247 679	1	0.120	700 247 689	1	0.120
20	15	NPT	1/2	16	180	700 247 680	1	0.130	700 247 690	1	0.130
25	20	NPT	3/4	16	380	700 247 681	1	0.260	700 247 691	1	0.280
32	25	NPT	1	16	460	700 247 682	1	0.290	700 247 692	1	0.290
40	32	NPT	1 1/4	16	850	700 247 683	1	0.490	700 247 693	1	0.490
50	40	NPT	1 1/2	16	1080	700 247 684	1	0.710	700 247 694	1	0.720
63	50	NPT	2	16	1670	700 247 685	1	1.460	700 247 695	1	1.470
75	65	NPT	2 1/2	16	2950	700 247 686	1	3.500	700 247 696	1	3.510
90	80	NPT	3	16	3600	700 247 687	1	5.500	700 247 697	1	5.520
110	100	NPT	4	16	4150	700 247 688	1	8.820	700 247 698	1	8.860

D (mm)	L (mm)	L2 (mm)	z (mm)
50	105	56	67
50	105	56	61
58	121	65	70
68	133	71	76
84	154	85	90
97	164	89	94
124	183	101	107
166	233	136	144
200	254	141	151
238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>