


PROGEF Plus silicone free Check valve type 562
With butt fusion spigots IR-Plus
SDR11 metric

Model:

- Material: PP-H / silicone free cleaned
- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

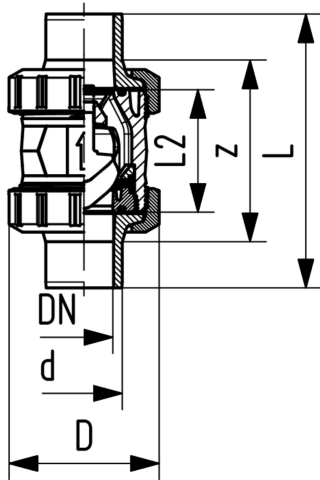

d	DN	PN	Cv-value	EPDM	FKM	D	L	L2	e	closest
(mm)	(mm)	(bar)	(l/min)	Code	Code	(mm)	(mm)	(mm)	(mm)	inch
20	15	10	180	167 562 242	167 562 252	50	130	56	1.9	1/2
25	20	10	380	167 562 243	167 562 253	58	143	65	2.3	3/4
32	25	10	460	167 562 244	167 562 254	68	150	71	2.9	1
40	32	10	850	167 562 245	167 562 255	84	171	85	3.7	1 1/4
50	40	10	1080	167 562 246	167 562 256	97	191	89	4.6	1 1/2
63	50	10	1670	167 562 247	167 562 257	124	220	101	5.8	2
75	65	10	2950	167 562 248	167 562 258	166	266	136	6.8	2 1/2
90	80	10	3600	167 562 249	167 562 259	200	264	141	8.2	3
110	100	10	4150	167 562 250	167 562 260	238	301	164	10.0	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>