
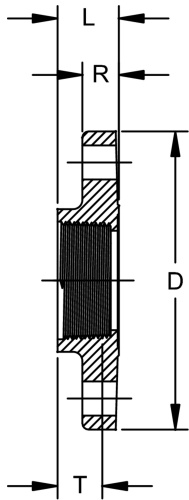


ChlorFIT One Piece Flange (FPT) Schedule 80 CORZAN® CPVC

- ANSI 150 Class according to ANSI B16.5
- 150 psi @ 73°F (10.3 bar @ 22.7°C)
- HC = Honeycomb (Face)



Size (inch)	P/L	Code	Pack Qty	# holes	Bolt Dia. (inch)	bolt cir. dia. (inch)	D (inch)	L (inch)	T (inch)	R (inch)	Design
½	625	9852-005	5	4	½	2.38	3.51	0.89	0.77	0.39	HC
¾	625	9852-007	5	4	½	2.75	3.89	0.91	0.79	0.45	HC
1	625	9852-010	5	4	½	3.13	4.28	1.13	1.00	0.53	HC
1 ¼	625	9852-012	5	4	½	3.50	4.62	1.20	1.06	0.58	HC
1 ½	625	9852-015	5	4	½	3.88	4.99	1.19	1.03	0.68	HC
2	625	9852-020	5	4	⅝	4.75	6.02	1.22	1.06	0.70	HC
2 ½	625	9852-025	5	4	⅝	5.50	7.00	1.72	1.53	0.75	HC
3	625	9852-030	5	4	⅝	6.00	7.50	2.15	1.63	1.15	HC
4	625	9852-040	5	8	⅝	7.50	9.00	2.30	1.77	1.23	HC

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>