


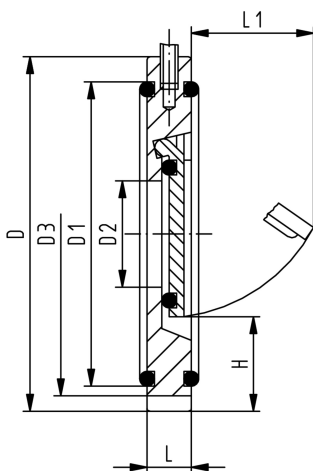

Wafer check valve type 369 PVC-U With Hastelloy C spring

Model:

- Supporting eyelets for simple fitting
- Suitable for vertical and horizontal mounting

Installation instruction:

- Installation between ISO/DIN (all dimensions) and ANSI/BS flange adaptors (all except DN32 and DN125)
- Installation with ANSI/BS flange adaptor: for wafer check valves DN40 to DN80 you have to use ANSI/BS flange adaptors with the next bigger dimension (example DN40 wafer check valve between DN50 ANSI/BS flange adaptor)
- Centering by body diameter (ISO/DIN by D3, ANSI/BS by D)
- Sealing with special flange gasket (except DN32, o-ring)
- A stabilizing zone of at least 5 times nominal diameter (DN) should be provided before and after the wafer check valve (10 times DN is recommended)
- No direct installation on pump flange or following bend allowed
- The using of PVC-U pipe PN16 is only possible up to d63

d (mm)	Size (inch)	EPDM Code	FKM Code
40	1 1/4	161 369 082	161 369 102
50	1 1/2	161 369 083	161 369 103
63	2	161 369 084	161 369 104
75	2 1/2	161 369 085	161 369 105
90	3	161 369 086	161 369 106
110	4	161 369 087	161 369 107
140	5	161 369 089	161 369 109
160	6	161 369 090	161 369 110
225	8	161 369 091	161 369 111
280	10	161 369 092	161 369 112
315	12	161 369 093	161 369 113

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>