


T-stuk 90°, reductie met gelaste aftakking

- 10 bar gas / 16 bar water

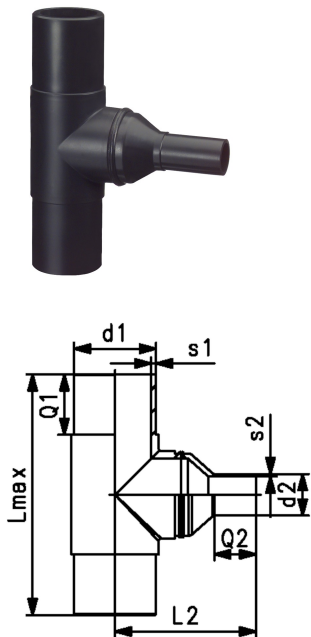

d1	d2	DN	PN	code	gewicht	L2	Lmax	Q1	Q2	s1	s2
(mm)	(mm)	(mm)	(bar)		(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
25	20	20	16	753 201 002	0,053	101	160	52	52	3,0	3,0
32	20	25	16	753 201 003	0,094	105	170	54	52	3,0	3,0
32	25	25	16	753 201 004	0,098	110	170	54	52	3,0	3,0
40	20	32	16	753 201 005	0,124	120	190	57	52	3,7	3,0
40	25	32	16	753 201 069	0,160	120	190	57	52	3,7	3,0
40	32	32	16	753 201 070	0,160	120	190	57	52	3,7	3,0
50	20	40	16	753 201 072	0,252	140	210	63	52	4,6	3,0
50	25	40	16	753 201 077	0,203	130	210	63	52	4,6	3,0
50	32	40	16	753 201 080	0,207	130	210	63	53	4,6	3,0
50	40	40	16	753 201 081	0,224	130	210	63	57	4,6	3,7
75	40	65	16	753 201 084	0,603	180	264	72	57	6,8	3,7
125	63	100	16	753 201 085	2,359	225	366	92	61	11,4	5,8
125	75	100	16	753 201 086	2,434	235	366	92	72	11,4	6,8
140	75	125	16	753 201 087	3,038	230	396	92	70	12,7	6,8
140	90	125	16	753 201 089	3,092	235	396	92	79	12,7	8,2
140	110	125	16	753 201 090	3,208	240	396	92	82	12,7	10,0
140	125	125	16	753 201 091	4,170	240	396	92	90	12,7	11,4
160	125	150	16	753 201 092	4,544	265	420	102	92	14,6	11,4
160	140	150	16	753 201 093	5,895	270	420	102	96	14,6	12,7
180	125	150	16	753 201 094	6,111	285	460	107	92	16,4	11,4
180	140	150	16	753 201 095	6,317	295	460	107	110	16,4	12,7
200	125	200	16	753 201 096	8,424	295	500	117	92	18,2	11,4
200	140	200	16	753 201 097	10,570	310	500	117	110	18,2	12,7
200	180	200	16	753 201 098	9,031	310	500	117	110	18,2	16,4
225	125	200	16	753 201 099	11,260	320	540	122	92	20,5	11,4
225	140	200	16	753 201 100	14,574	335	540	122	110	20,5	12,7
225	200	200	16	753 201 101	14,925	340	540	122	117	20,5	18,2
250	180	250	16	753 201 102	14,327	350	576	130	105	22,7	16,4
250	200	250	16	753 201 103	19,220	360	576	130	112	22,7	18,2
250	225	250	16	753 201 104	15,240	390	576	130	120	22,7	20,5
280	200	250	16	753 201 105	24,520	420	616	139	112	25,4	18,2
280	225	250	16	753 201 106	21,755	420	616	139	120	25,4	20,5
280	250	250	16	753 201 107	21,055	420	616	139	130	25,4	22,7
315	280	300	16	753 201 109	34,950	480	690	150	139	28,6	25,4
355	250	350	16	753 201 110	48,900	530	818	165	130	32,3	22,7
355	280	350	16	753 201 111	49,300	480	818	165	139	32,3	25,4
355	315	350	16	753 201 112	49,690	480	818	165	150	32,3	28,6
400	280	400	16	753 201 113	52,915	530	910	180	139	36,4	25,4
400	315	400	16	753 201 114	53,625	580	910	180	150	36,4	28,6
400	355	400	16	753 201 115	54,075	675	910	180	165	36,4	32,3

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>