


PROGEF Plus Check valve type 561 silicone free
Without spring
With socket fusion spigots metric

Model:

- Material: PP-H / silicone free cleaned
- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

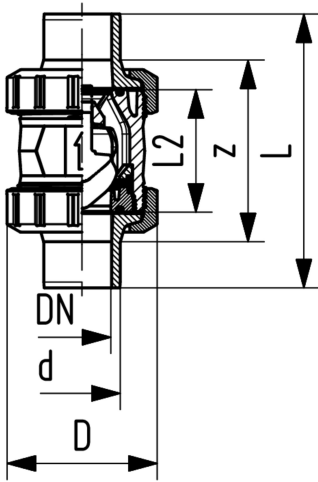

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
16	10	10	190	167 561 221	0.080	167 561 231	0.080
20	15	10	180	167 561 222	0.090	167 561 232	0.090
25	20	10	380	167 561 223	0.170	167 561 233	0.190
32	25	10	460	167 561 224	0.200	167 561 234	0.200
40	32	10	850	167 561 225	0.340	167 561 235	0.350
50	40	10	1080	167 561 226	0.510	167 561 236	0.510
63	50	10	1670	167 561 227	0.940	167 561 237	0.950
75	65	10	2950	167 561 228	2.360	167 561 238	2.370
90	80	10	3600	167 561 229	3.730	167 561 239	3.750
110	100	10	4150	167 561 230	5.960	167 561 240	5.980

d (mm)	D (mm)	L (mm)	L2 (mm)	L3 (mm)	closest inch (inch)
16	50	110	56		$\frac{3}{8}$
20	50	120	56	130	$\frac{1}{2}$
25	58	139	65	150	$\frac{3}{4}$
32	68	150	71	160	1
40	84	170	85	180	1 $\frac{1}{4}$
50	97	190	89	200	1 $\frac{1}{2}$
63	124	220	101	230	2
75	166	280	136	290	2 $\frac{1}{2}$
90	200	296	141	310	3
110	238	336	164	350	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>