


PROGEF Standard
Pressure reducing valve type 582
Unions with butt fusion spigots SDR11 metric
Without manometer

Model:

- Diaphragm PTFE/EPDM
- Integrated stainless steel mounting inserts
- 0.5-9.0 bar (7-130 psi)

0.3-3.0 bar (4-44 psi) on request

Manometer on request

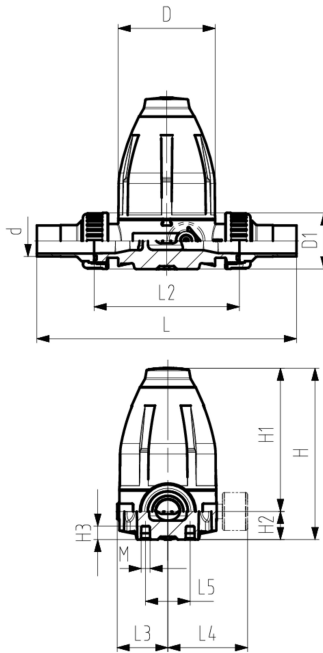

d	DN	Size	PN	SDR	O-rings EPDM Code	weight (kg)	SP	GP	O-rings FKM Code
(mm)	(mm)	(inch)	(bar)						
20	15	½	10	11	167 582 502	0.640	1		167 582 512
25	20	¾	10	11	167 582 503	1.350	1		167 582 513
32	25	1	10	11	167 582 504	1.370	1		167 582 514
40	32	1 ¼	10	11	167 582 505	3.660	1		167 582 515
50	40	1 ½	10	11	167 582 506	3.710	1		167 582 516
63	50	2	10	11	167 582 507	3.860	1		167 582 517

d	D	D1	H	H1	H2	H3	L	L2	L3	M	z	closest inch
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(inch)
20	79	48	132	111	21	12	228	120	42	M6	126	½
25	100	58	177	148	29	14	264	150	53	M6	156	¾
32	100	65	177	148	29	14	270	150	53	M6	156	1
40	147	77	251	207	44	21	331	205	76	M8	211	1 ¼
50	147	84	251	207	44	21	337	205	76	M8	211	1 ½
63	147	111	251	207	44	21	343	205	76	M8	211	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>