


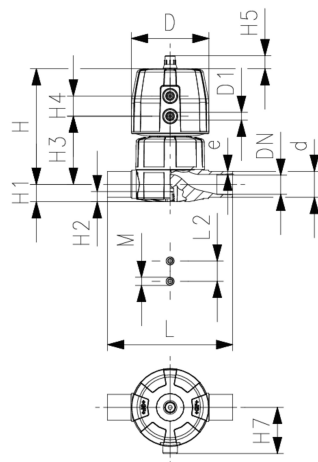

SYGEF Plus
Diaphragm valve DIASTAR TenPlus
FC (Fail safe to close)
With butt fusion spigots metric

Model:

- Material: PVDF-HP
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals

Option:

- Individual configuration of the valve (see diagram)
- Comprehensive range of accessories available

Working Pressure: **both sides**

*O-ring material: FKM white

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value (Δp=1 bar) (l/min)	PTFE/EPDM Code	SP	Weight (kg)	PTFE/FKM Code	SP	Weight (kg)
20	15	½	10	125	181 685 132	1	1.079	181 685 152	1	1.079
25	20	¾	10	271	181 685 133	1	1.208	181 685 153	1	1.208
32	25	1	10	481	181 685 134	1	2.021	181 685 154	1	2.021
40	32	1 ¼	10	759	181 685 135	1	3.349	181 685 155	1	3.349
50	40	1 ½	10	1263	181 685 136	1	5.288	181 685 156	1	5.288
63	50	2	10	1728	181 685 137	1	6.150	181 685 157	1	6.150

d (mm)	D (mm)	D1_G (inch)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H7 (mm)	L (mm)	L2 (mm)	M (mm)	e (mm)	Lift = Hx (mm)
20	96	⅝	127	14	12	68	25	16	57	124	25	M6	1.9	7
25	96	⅝	132	18	12	73	25	16	57	144	25	M6	1.9	10
32	120	⅝	167	22	12	93	26	26	69	154	25	M6	2.4	13
40	150	¾	196	26	15	101	36	26	88	174	45	M8	2.4	15
50	180	¾	239	32	15	124	37	26	103	194	45	M8	3.0	19
63	180	¾	251	39	15	137	37	26	103	224	45	M8	3.0	23

d (mm)	closest inch (inch)
20	¾
25	⅝
32	1
40	1 ¼
50	1 ½
63	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>