


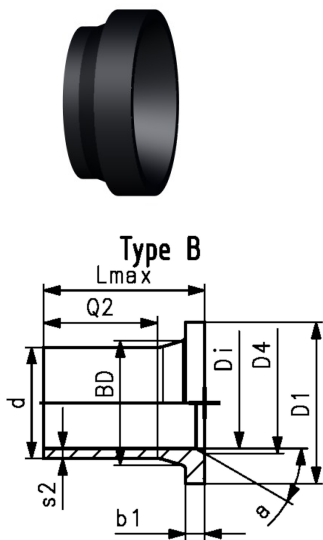

ecoFIT adaptor for butterfly valves PE100
d355-800mm / SDR11 / jointing face: flat and metric

Model:

- For buttfusion welding according to DVS 2207
- Type B: with chamfer
- Suitable for plastic butterfly valves type **567/578/565**
- Suitable for metal butterfly valves type **038/039/044/065**
- Profile seal d355-d800: NBR, EPDM, FKM
- Pressure rating: 16 bar d355-d500
- Pressure rating: 10 bar d500-d800

Note:

*machined

d	Di	Type	DN	SDR	PN	Code	Weight
(mm)	(mm)		(mm)		(bar)		(kg)
355	284	B	350	11	16	753 798 924	8.400
400	320	B	400	11	16	753 798 925	11.000
450	360	B	450	11	16	753 798 926	18.800
500	400	B	500	11	16	753 798 927	19.900
560	458	B	600	11	10	753 798 728	29.300
630	515	B	600	11	10	753 798 729	23.100
710	581	B	700	11	10	753 798 730	33.800
800	655	B	800	11	10	753 798 731	41.800

d	Lmax	D1	D4	Q2	s2	b1	BD	a
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
355	187	430	350	70	33.9	65	373	25
400	196	482	400	70	38.2	70	427	25
450	272	533	450	105	43.0	107	467	23
500	261	585	498	105	47.8	90	530	25
560	282	685	610	60	50.8	147	615	21
630	210	685	610	60	57.2	132	642	21
710	215	800	701	20	64.5	155	737	20
800	194	905	785	18	72.6	140	840	28

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>